

Data sheet for SINAMICS G130



MLFB-Ordering data: 6SL3310-1GE38-4AA3

Client order no.:
Order no.:
Offer no.:
Remarks:


Item no.:
Consignment no.:
Project:

Rated data	
Input	
Supply frequency	47...63 Hz
Input supply voltage	400 V ±10%
Rated input current	873 A
Max. current	1344 A
Pulse number	6
Regenerative capability	No (2Q)
Output:	
Output voltage	400 V
Rated output (LO) in kW	450 kW
Rated power (HO) in kW	400 kW
Rated output current	840 A
Rated output current (LO)	820 A
Rated output current (HO)	700 A
Output current Max	1230 A
Pulse frequency (default setting)	1.25 kHz

Basic data:	
Power losses ΔP	10.4 kW
Sound pressure level L _{pA} (1 m)	70 dB
Conductor cross section, max. (IEC)	4 x 240 mm ²
Degree of protection	IP00
Dimensions (H x W x D)	1506 mm x 503 mm x 540 mm
Weight approx.	294 kg
Frame size	HX

Environmental conditions	
Installation altitude	1000 m
Coolant	Air
Air cooling requirements	0.78 m ³ /s
Ambient temperature	0 °C - +40 °C

Converter losses to IEC61800-9-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	43.7 %

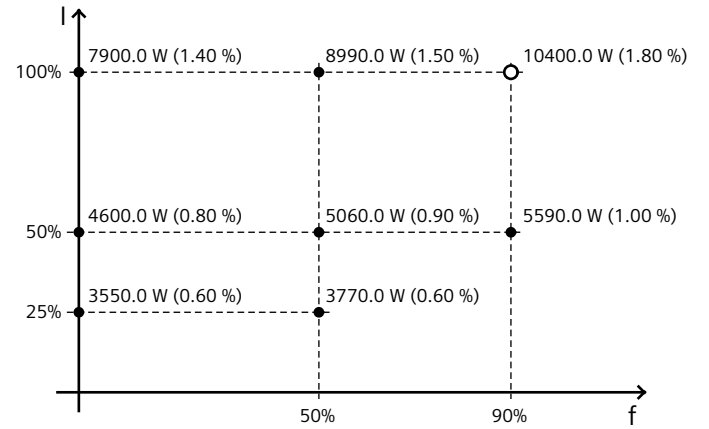

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

Special design	
Supplementary system components	
6SL30401GA011AA0 - Control Unit Kit CU320-2 PN (PROFINET, EtherNet/IP)	