

Article No. : 6SL3210-1KE13-2UP1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data		Inputs / outputs		
Input		Standard digital inputs		
Number of phases	3 AC	Number	6	
Line voltage	380 ... 480 V +10 % -20 %	Switching level: 0→1	11 V	
Line frequency	47 ... 63 Hz	Switching level: 1→0	5 V	
Rated current (LO)	4.10 A	Max. inrush current	15 mA	
Rated current (HO)	3.20 A	Fail-safe digital inputs		
Output		Number	1	
Number of phases	3 AC	Digital outputs		
Rated voltage	400V IEC	480V NEC¹⁾	Number as relay changeover contact	1
Rated power (LO)	1.10 kW	1.50 hp	Output (resistive load)	DC 30 V, 0.5 A
Rated power (HO)	0.75 kW	1.00 hp	Number as transistor	1
Rated current (LO)	3.10 A	Output (resistive load)	DC 30 V, 0.5 A	
Rated current (HO)	2.20 A	Analog / digital inputs		
Rated current (IN)	3.20 A	Number	1 (Differential input)	
Max. output current	4.40 A	Resolution	10 bit	
Pulse frequency	4 kHz	Switching threshold as digital input		
Output frequency for vector control	0 ... 240 Hz	0→1	4 V	
Output frequency for V/f control	0 ... 550 Hz	1→0	1.6 V	
Overload capability		Analog outputs		
Low Overload (LO)	150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time	Number	1 (Non-isolated output)	
High Overload (HO)	200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time	PTC/ KTY interface		
1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5^{\circ}\text{C}$		Closed-loop control techniques		
General tech. specifications		V/f linear / square-law / parameterizable	Yes	
Power factor λ	0.70 ... 0.85	V/f with flux current control (FCC)	Yes	
Offset factor $\cos \phi$	0.95	V/f ECO linear / square-law	Yes	
Efficiency η	0.97	Sensorless vector control	Yes	
Sound pressure level (1m)	52 dB	Vector control, with sensor	No	
Power loss	46.1 W	Encoderless torque control	No	
Filter class (integrated)	Unfiltered	Torque control, with encoder	No	
Communication				
Communication	PROFIBUS DP			

Article No. : 6SL3210-1KE13-2UP1

Ambient conditions

Cooling	Air cooling using an integrated fan
Cooling air requirement	0.005 m ³ /s (0.177 ft ³ /s)
Installation altitude	1,000 m (3,280.84 ft)

Ambient temperature

Operation	-10 ... 40 °C (14 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	--

Connections

Signal cable

Conductor cross-section	0.15 ... 1.50 mm ² (AWG 24 ... AWG 16)
-------------------------	--

Line side

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)

Motor end

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)

DC link (for braking resistor)

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)
Line length, max.	15 m (49.21 ft)
PE connection	On housing with M4 screw

Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	150 m (492.13 ft)

Mechanical data

Degree of protection	IP20 / UL open type
----------------------	---------------------

Frame size	FSA
------------	-----

Net weight	1.70 kg (3.75 lb)
------------	-------------------

Dimensions

Width	73 mm (2.87 in)
Height	196 mm (7.72 in)
Depth	203 mm (7.99 in)

Standards


Compliance with standards	UL, cUL, CE, C-Tick (RCM)
---------------------------	---------------------------

CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC
------------	---

Converter losses to IEC61800-9-2*

Efficiency class	IE2
------------------	-----

Comparison with the reference converter (90% / 100%)	26.2 %
--	--------

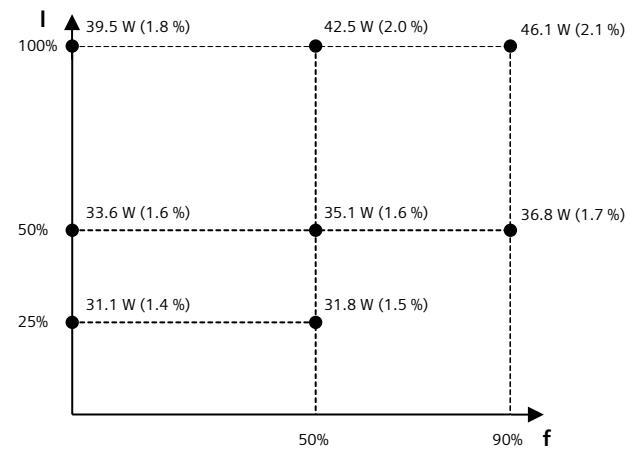

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V