




Accessory 3WA/3WL Shunt trip (ST) 5% OP, 110-127 V AC / 110-125 V DC momentary duty, with cut-off switch, not for continuous duty

Model	
product brand name	SETRON
product designation	shunt release
design of the product	shunt release (ST) 5% OP, 110 to 127 V AC / 110 to 125 V DC for momentary duty, with cut-off switch, no continuous duty possible
design of the fuse link	fuse: 4 A, miniature circuit breaker C characteristic: 4 A
closing apparent power [VA]	250 VA
operating apparent power [VA]	300 VA
closing active power [W]	300 W
opening time (electrical) of circuit breaker at $U_s = 100\%$	50 ms
control supply voltage (U_s) at AC rated value	110 to 127 V 50/60 Hz
ambient temperature during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C

Approvals Certificates	
General Product Approval	Test Certificates

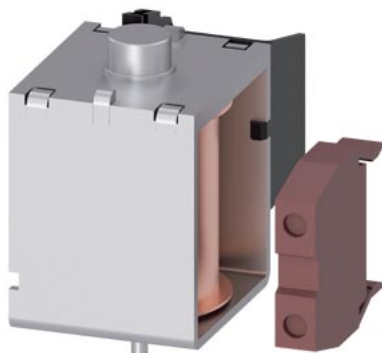

[Confirmation](#)



[Type Test Certificates/Test Report](#)

Test Certificates	Marine / Shipping	other
-------------------	-------------------	-------

[Special Test Certificate](#)



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>



Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AD25>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD25>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

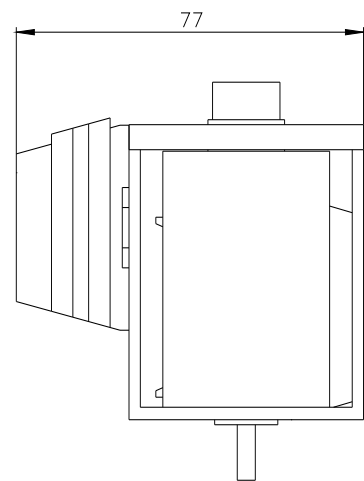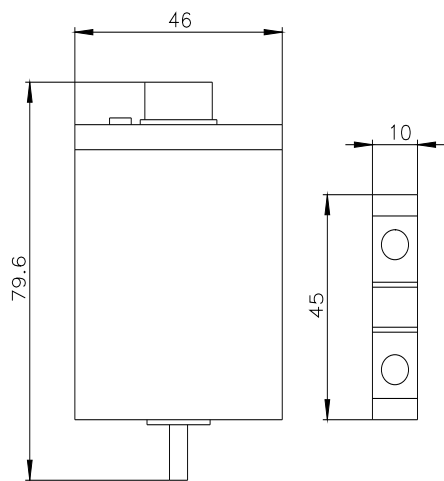

last modified:

9/29/2024 

