

Data sheet for SIMOTICS S-1FK7

MLFB-Ordering data1FK7032-5AK71-1HH3



Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data		Mechanical data	
Rated speed (100 K)	6000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	6	Motor type	Compact
Rated torque (100 K)	0.8 Nm	Shaft height	36
Rated current	1.4 A	Cooling	Natural cooling
Static torque (60 K)	0.85 Nm	Radial runout tolerance	0.035 mm
Static torque (100 K)	1.10 Nm	Concentricity tolerance	0.08 mm
Stall current (60 K)	1.40 A	Axial runout tolerance	0.08 mm
Stall current (100 K)	1.70 A	Vibration severity grade	Grade A
Moment of inertia	0.690 kgcm²	Connector size	1
Efficiency	88.0 %	Degree of protection	IP64
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	0.67 Nm/A	Temperature monitoring	KTY84 temperature sensor in the stator winding
Voltage constant at 20° C	45.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	5.20 Ω	Color of the housing	Standard (Anthracite RAL 7016)
Rotating field inductance	18.5 mH	Holding brake	with holding brake
Electrical time constant	3.60 ms	Shaft end	Plain shaft
Mechanical time constant	2.20 ms	Encoder system	Encoder AM512S/R: absolute encoder 512 S/R, 4096 revolutions multi-turn, with EnDat interface
Thermal time constant	25 min		
Shaft torsional stiffness	6500 Nm/rad		
Net weight of the motor	3.0 kg		

MLFB-Ordering data 1FK7032-5AK71-1HH3



Optimum operating point		Recommended Motor Module	
Optimum speed	6000 rpm	Rated inverter current	3 A
Optimum power	0.5 kW	Maximum inverter current	6 A
Limiting data		Maximum torque	3.90 Nm
Max. permissible speed (mech.)	10000 rpm		
Max. permissible speed (inverter)	12800 rpm		
Maximum torque	4.5 Nm		
Maximum current	7.0 A		
Holding brake			
Holding brake version	Permanent-magnet brake		
Holding torque	1.9 Nm		
Power supply voltage	DC 24 V ± 10 %		
Coil current	0.3 A		
Opening time	50 ms		
Closing time	30 ms		
Highest braking work	40 J		

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes



The reproduction or use of this document or its
contents is not permitted without express written authority.
Defenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwahlhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.


Confie a titre de secret d'entreprise. Tous droits reserves.
Confido como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

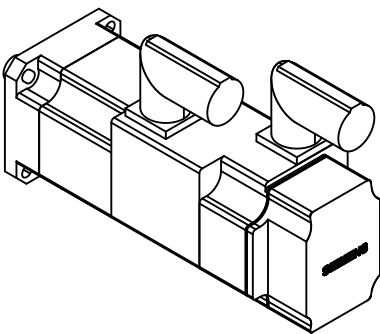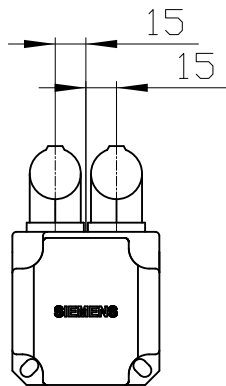


DIN 332-DR M5

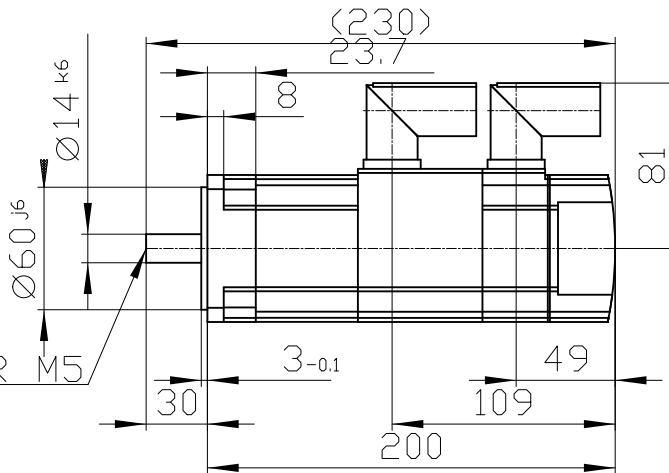

Connector size 1 = M23;
6-pole for power and brake



Connector size M23, 17-pole

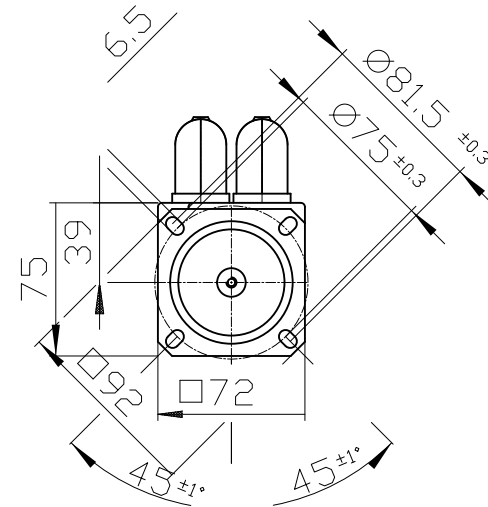

		-
Unit		mm [in]
Date		12/29/22
SIEMENS AG		1FK7032-5AK71-1HH3
-		-
DT		