

Data sheet for SIMOTICS S-1FK7



MLFB-Ordering data 1FK7034-2AF21-1QB1

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

| Engineering data            |                               | Mechanical data          |                                                       |
|-----------------------------|-------------------------------|--------------------------|-------------------------------------------------------|
| Rated speed (100 K)         | 3000 rpm                      | Motor type               | Permanent-magnet synchronous motor                    |
| Number of poles             | 6                             | Motor type               | Compact                                               |
| Rated torque (100 K)        | 1.4 Nm                        | Shaft height             | 36                                                    |
| Rated current               | 1.8 A                         | Cooling                  | Natural cooling                                       |
| Static torque (60 K)        | 1.35 Nm                       | Radial runout tolerance  | 0.035 mm                                              |
| Static torque (100 K)       | 1.60 Nm                       | Concentricity tolerance  | 0.08 mm                                               |
| Stall current (60 K)        | 1.55 A                        | Axial runout tolerance   | 0.08 mm                                               |
| Stall current (100 K)       | 1.90 A                        | Vibration severity grade | Grade A                                               |
| Moment of inertia           | 1.000 kgcm²                   | Connector size           | 1                                                     |
| Efficiency                  | 85.0 %                        | Degree of protection     | IP65                                                  |
| Physical constants          |                               | Design acc. to Code I    | IM B5 (IM V1, IM V3)                                  |
| Torque constant             | 0.84 Nm/A                     | Temperature monitoring   | Pt1000 temperature sensor                             |
| Voltage constant at 20° C   | 55.0 V/1000*min <sup>-1</sup> | Electrical connectors    | Connectors for signals and power rotatable            |
| Winding resistance at 20° C | 4.46 Ω                        | Color of the housing     | Standard (Anthracite RAL 7016)                        |
| Rotating field inductance   | 17.2 mH                       | Holding brake            | with holding brake                                    |
| Electrical time constant    | 3.85 ms                       | Shaft end                | Feather key                                           |
| Mechanical time constant    | 1.71 ms                       | Encoder system           | Encoder AS20DQI: absolute encoder single-turn 20 bits |
| Thermal time constant       | 30 min                        |                          |                                                       |
| Shaft torsional stiffness   | 3750 Nm/rad                   |                          |                                                       |
| Net weight of the motor     | 3.9 kg                        |                          |                                                       |



Figure similar

MLFB-Ordering data                      1FK7034-2AF21-1QB1





| Optimum operating point           |                        | Recommended Motor Module |         |
|-----------------------------------|------------------------|--------------------------|---------|
| Optimum speed                     | 3000 rpm               | Rated inverter current   | 2 A     |
| Optimum power                     | 0.5 kW                 | Maximum inverter current | 5 A     |
| Limiting data                     |                        | Maximum torque           | 3.90 Nm |
| Max. permissible speed (mech.)    | 10000 rpm              |                          |         |
| Max. permissible speed (inverter) | 5200 rpm               |                          |         |
| Maximum torque                    | 6.5 Nm                 |                          |         |
| Maximum current                   | 8.0 A                  |                          |         |
| Holding brake                     |                        |                          |         |
| Holding brake version             | Permanent-magnet brake |                          |         |
| Holding torque                    | 1.9 Nm                 |                          |         |
| Power supply voltage              | DC 24 V ± 10 %         |                          |         |
| Coil current                      | 0.3 A                  |                          |         |
| Opening time                      | 50 ms                  |                          |         |
| Closing time                      | 30 ms                  |                          |         |
| Highest braking work              | 40 J                   |                          |         |

Copyright© Siemens AG 2005  
Cada-drawing do not make any  
manual changes



The reproduction or use of this document or its  
contents is not permitted without express written authority.  
Offenders will be liable for damages. All rights, including rights  
created by patent grant or registration of a utility model or design,  
are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwer-  
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht  
ausdrücklich zugestanden. Zuwahlhandlungen verpflichten  
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer  
den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves.  
Confido como secreto industrial. Nos reservamos todos los derechos  
Comunicado como segredo empresarial. Reservados todos os direitos

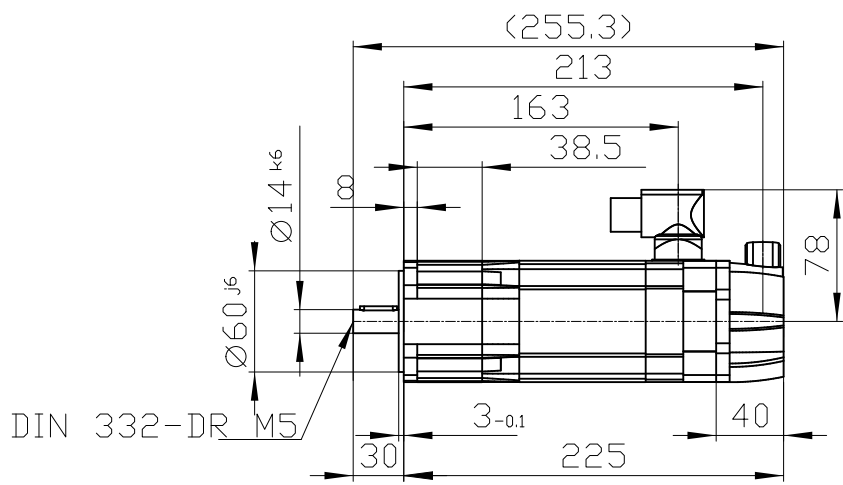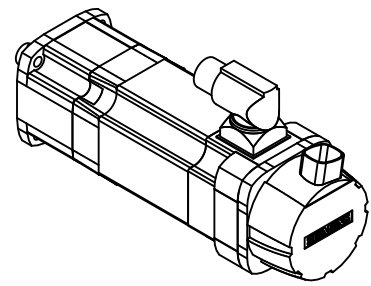

Connector size 1 = M23;  
6-pole for power and brake

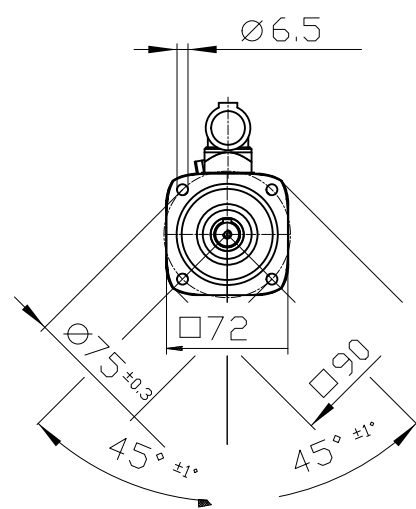

|            |         |                    |
|------------|---------|--------------------|
|            | —       |                    |
|            | —       |                    |
| Unit       | mm [in] | 1FK7034-2AF21-1QB1 |
| Date       | 2/23/23 |                    |
| SIEMENS AG |         | —                  |
| —          |         | DT                 |