

Data sheet for SIMOTICS S-1FK7



Figure similar

MLFB-Ordering data 1FK7034-2AK71-1RB0

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data		Mechanical data	
Rated speed (100 K)	6000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	6	Motor type	Compact
Rated torque (100 K)	1.0 Nm	Shaft height	36
Rated current	1.3 A	Cooling	Natural cooling
Static torque (60 K)	1.35 Nm	Radial runout tolerance	0.035 mm
Static torque (100 K)	1.60 Nm	Concentricity tolerance	0.08 mm
Stall current (60 K)	1.55 A	Axial runout tolerance	0.08 mm
Stall current (100 K)	1.90 A	Vibration severity grade	Grade A
Moment of inertia	1.000 kgcm²	Connector size	1
Efficiency	88.0 %	Degree of protection	IP64
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	0.84 Nm/A	Temperature monitoring	Pt1000 temperature sensor
Voltage constant at 20° C	55.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	4.46 Ω	Color of the housing	Standard (Anthracite RAL 7016)
Rotating field inductance	17.2 mH	Holding brake	with holding brake
Electrical time constant	3.85 ms	Shaft end	Feather key
Mechanical time constant	1.71 ms	Encoder system	Encoder AM20DQI: absolute encoder 20 bits (resolution 1048576, encoder-internal 512 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)
Thermal time constant	30 min		
Shaft torsional stiffness	3750 Nm/rad		
Net weight of the motor	3.9 kg		



Figure similar

MLFB-Ordering data 1FK7034-2AK71-1RB0





Optimum operating point		Recommended Motor Module	
Optimum speed	6000 rpm	Rated inverter current	3 A
Optimum power	0.6 kW	Maximum inverter current	9 A
Limiting data		Maximum torque	6.50 Nm
Max. permissible speed (mech.)	10000 rpm		
Max. permissible speed (inverter)	10000 rpm		
Maximum torque	6.5 Nm		
Maximum current	8.0 A		
Holding brake			
Holding brake version	Permanent-magnet brake		
Holding torque	1.9 Nm		
Power supply voltage	DC 24 V ± 10 %		
Coil current	0.3 A		
Opening time	50 ms		
Closing time	30 ms		
Highest braking work	40 J		

Copyright© Siemens AG 2005
Cada-drawing do not make any
manual changes



The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Wetergabe soale Vervielfaeligung dieser Unterlage. Verwer-
tung und Mittelung ihres Inhalts nicht gestattet, soweit nicht
ausdruecklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves.
Confido como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

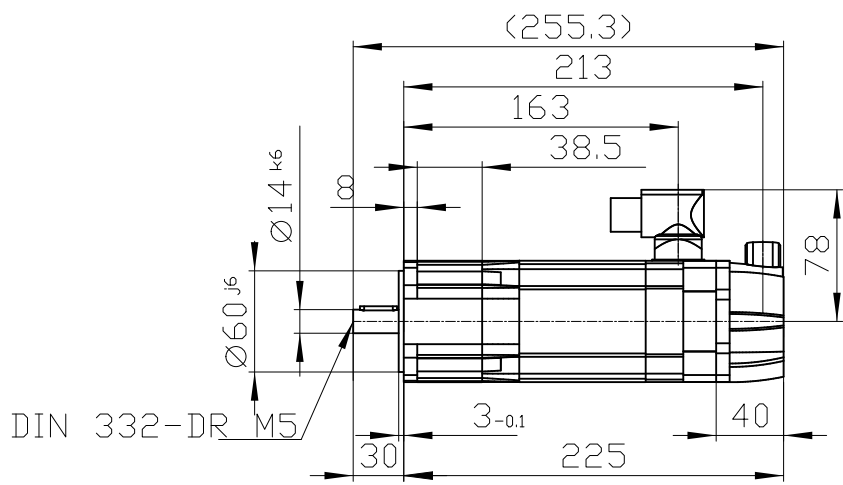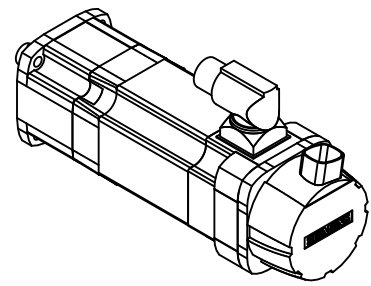

Connector size 1 = M23;
6-pole for power and brake

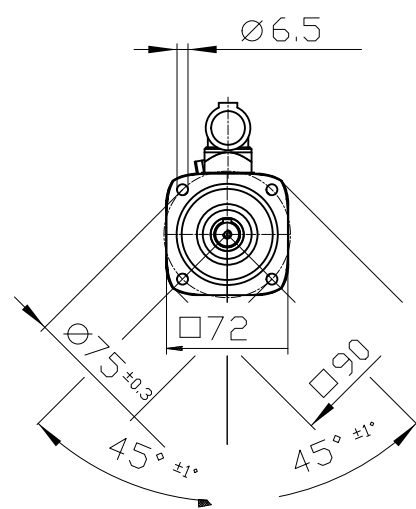

		-
		-
Unit	mm [in]	1FK7034-2AK71-1RB0
Date	2/23/23	
SIEMENS AG		-
-		DT