



MLFB-Ordering data 1FK7040-2AK71-1BG1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data		Mechanical data	
Rated speed (100 K)	6000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	8	Motor type	Compact
Rated torque (100 K)	1.1 Nm	Shaft height	48
Rated current	1.9 A	Cooling	Natural cooling
Static torque (60 K)	1.30 Nm	Radial runout tolerance	0.040 mm
Static torque (100 K)	1.60 Nm	Concentricity tolerance	0.08 mm
Stall current (60 K)	1.90 A	Axial runout tolerance	0.08 mm
Stall current (100 K)	2.35 A	Vibration severity grade	Grade A
Moment of inertia	1.600 kgcm²	Connector size	1
Efficiency	88.0 %	Degree of protection	IP65
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	0.68 Nm/A	Temperature monitoring	Pt1000 temperature sensor
Voltage constant at 20° C	43.4 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	2.87 Ω	Color of the housing	Standard (Anthracite RAL 7016)
Rotating field inductance	16.5 mH	Holding brake	without holding brake
Electrical time constant	5.70 ms	Shaft end	Plain shaft
Mechanical time constant	3.00 ms	Encoder system	Encoder AS24DQI: absolute encoder single-turn 24 bits
Thermal time constant	25 min		
Shaft torsional stiffness	18700 Nm/rad		
Net weight of the motor	3.2 kg		



MLFB-Ordering data 1FK7040-2AK71-1BG1




Optimum operating point		Recommended Motor Module	
Optimum speed	6000 rpm	Rated inverter current	3 A
Optimum power	0.7 kW	Maximum inverter current	9 A
Limiting data		Maximum torque	5.10 Nm
Max. permissible speed (mech.)	9000 rpm		
Max. permissible speed (inverter)	9000 rpm		
Maximum torque	5.1 Nm		
Maximum current	7.7 A		

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes


The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Weteregabe soale Vervielfaeligung dieser Unterlage. Verwer-
tung und Mittelung ihres Inhalts nicht gestattet, soweit nicht
ausdruecklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.



Confie a titre de secret d'entreprise. Tous droits reserves.
Confido como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

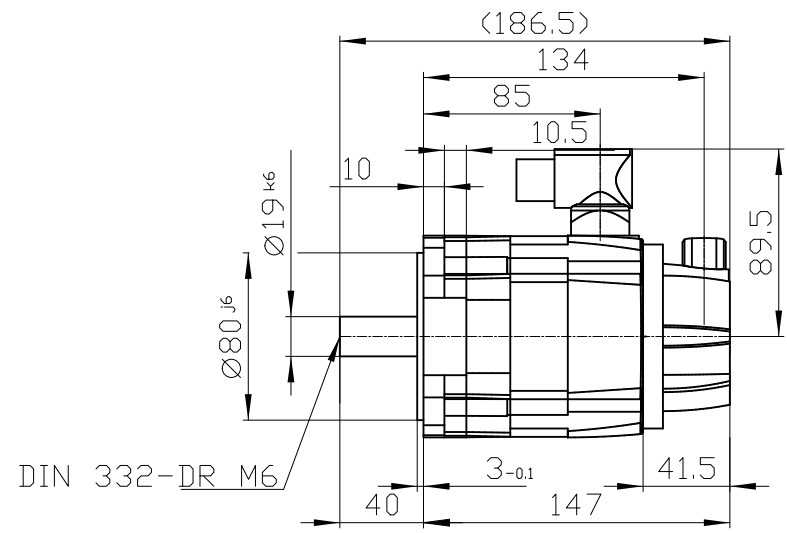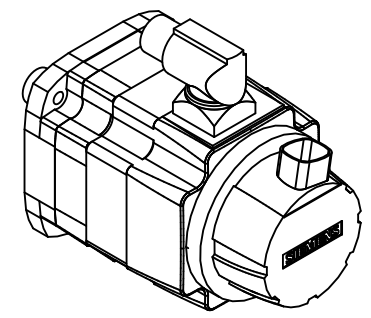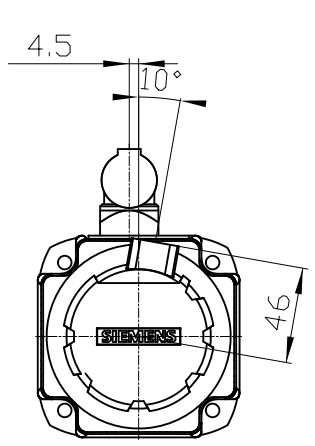

DIN 332-DR M6



Connector size 1 = M23;
6-pole for power and brake

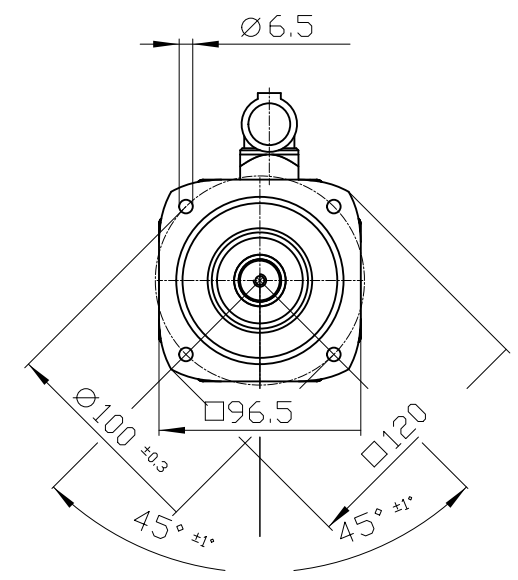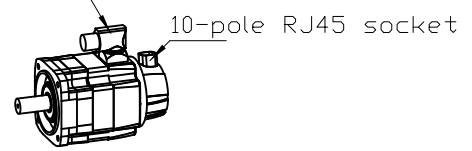

		-	
Unit		mm [in]	1FK7040-2AK71-1BG1
Date		7/31/23	
SIEMENS AG		-	
-		DT	