

MLFB-Ordering data1FK7040-5AK71-1DG0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

| Engineering data            |                               | Mechanical data          |                                                                                                                            |
|-----------------------------|-------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Rated speed (100 K)         | 6000 rpm                      | Motor type               | Permanent-magnet synchronous motor                                                                                         |
| Number of poles             | 8                             | Motor type               | Compact                                                                                                                    |
| Rated torque (100 K)        | 1.1 Nm                        | Shaft height             | 48                                                                                                                         |
| Rated current               | 1.7 A                         | Cooling                  | Natural cooling                                                                                                            |
| Static torque (60 K)        | 1.30 Nm                       | Radial runout tolerance  | 0.040 mm                                                                                                                   |
| Static torque (100 K)       | 1.60 Nm                       | Concentricity tolerance  | 0.08 mm                                                                                                                    |
| Stall current (60 K)        | 1.80 A                        | Axial runout tolerance   | 0.08 mm                                                                                                                    |
| Stall current (100 K)       | 2.25 A                        | Vibration severity grade | Grade A                                                                                                                    |
| Moment of inertia           | 1.690 kgcm²                   | Connector size           | 1                                                                                                                          |
| Efficiency                  | 88.0 %                        | Degree of protection     | IP64                                                                                                                       |
| Physical constants          |                               | Design acc. to Code I    | IM B5 (IM V1, IM V3)                                                                                                       |
| Torque constant             | 0.68 Nm/A                     | Temperature monitoring   | KTY84 temperature sensor in the stator winding                                                                             |
| Voltage constant at 20° C   | 43.0 V/1000*min <sup>-1</sup> | Electrical connectors    | Connectors for signals and power rotatable                                                                                 |
| Winding resistance at 20° C | 3.30 Ω                        | Color of the housing     | without                                                                                                                    |
| Rotating field inductance   | 17.0 mH                       | Holding brake            | without holding brake                                                                                                      |
| Electrical time constant    | 5.15 ms                       | Shaft end                | Plain shaft                                                                                                                |
| Mechanical time constant    | 3.62 ms                       | Encoder system           | Encoder IC22DQ: incremental encoder 22 bits (resolution 4194304, encoder-internal 2048 S/R) + commutation position 11 bits |
| Thermal time constant       | 25 min                        |                          |                                                                                                                            |
| Shaft torsional stiffness   | 19000 Nm/rad                  |                          |                                                                                                                            |
| Net weight of the motor     | 3.5 kg                        |                          |                                                                                                                            |

MLFB-Ordering data                    1FK7040-5AK71-1DG0






| Optimum operating point           |          | Recommended Motor Module |         |
|-----------------------------------|----------|--------------------------|---------|
| Optimum speed                     | 6000 rpm | Rated inverter current   | 3 A     |
| Optimum power                     | 0.7 kW   | Maximum inverter current | 6 A     |
| Limiting data                     |          | Maximum torque           | 4.10 Nm |
| Max. permissible speed (mech.)    | 9000 rpm |                          |         |
| Max. permissible speed (inverter) | 9990 rpm |                          |         |
| Maximum torque                    | 5.1 Nm   |                          |         |
| Maximum current                   | 7.7 A    |                          |         |

Copyright© Siemens AG 2005  
Cod-drawing do not make any manual changes

The reproduction or use of this document or its contents is not permitted without express written authority. Diffenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.


Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder Gk-Entragung.

Confide a titre de secret d'entreprise. Tous droits reserves. Confido como secreto industrial. Nos reservamos todos los derechos Comunicado como segredo empresarial. Reservados todos os direitos

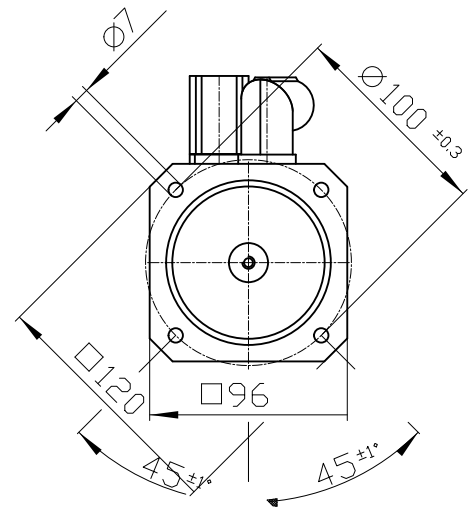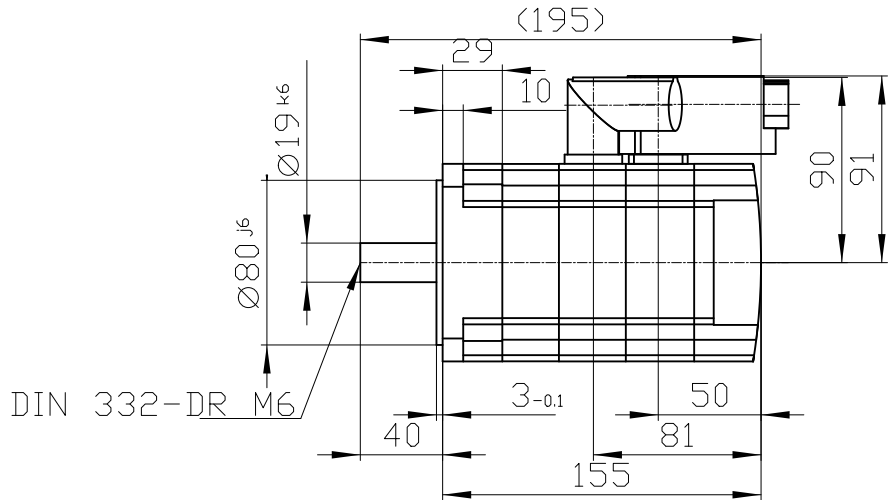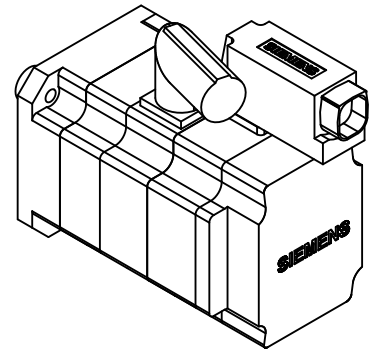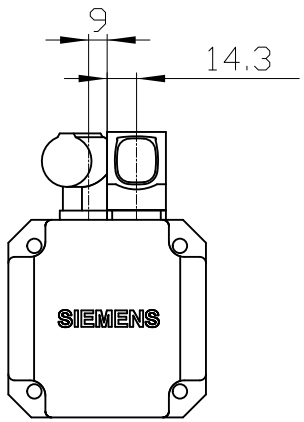

Connector size 1 = M23;  
6-pole for power and brake

10-pole RJ45 socket



|            |         |                    |
|------------|---------|--------------------|
|            | -       |                    |
|            | -       |                    |
| Unit       | mm [in] | 1FK7040-5AK71-1DG0 |
| Date       | 2/6/23  |                    |
| SIEMENS AG |         | -                  |
| -          |         | DT                 |