


Data sheet for SIMOTICS S-1FK7

MLFB-Ordering data1FK7042-5AF71-1KH0








Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :


Engineering data		Mechanical data	
Rated speed (100 K)	3000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	8	Motor type	Compact
Rated torque (100 K)	2.6 Nm	Shaft height	48
Rated current	1.9 A	Cooling	Natural cooling
Static torque (60 K)	2.50 Nm	Radial runout tolerance	0.040 mm
Static torque (100 K)	3.00 Nm	Concentricity tolerance	0.08 mm
Stall current (60 K)	1.80 A	Axial runout tolerance	0.08 mm
Stall current (100 K)	2.20 A	Vibration severity grade	Grade A
Moment of inertia	3.450 kgcm²	Connector size	1
Efficiency	89.0 %	Degree of protection	IP64
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	1.40 Nm/A	Temperature monitoring	KTY84 temperature sensor in the stator winding
Voltage constant at 20° C	89.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	5.15 Ω	Color of the housing	without
Rotating field inductance	29.0 mH	Holding brake	with holding brake
Electrical time constant	5.60 ms	Shaft end	Plain shaft
Mechanical time constant	2.37 ms	Encoder system	Encoder AM16DQ: absolute encoder 16 bits (resolution 65536, encoder-internal 32 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)
Thermal time constant	30 min		
Shaft torsional stiffness	16000 Nm/rad		
Net weight of the motor	5.4 kg		

MLFB-Ordering data 1FK7042-5AF71-1KH0

Optimum operating point		Recommended Motor Module	
Optimum speed	3000 rpm	Rated inverter current	3 A
Optimum power	0.8 kW	Maximum inverter current	6 A
Limiting data		Maximum torque	8.40 Nm
Max. permissible speed (mech.)	9000 rpm		
Max. permissible speed (inverter)	6500 rpm		
Maximum torque	10.5 Nm		
Maximum current	7.4 A		
Holding brake			
Holding brake version	Permanent-magnet brake		
Holding torque	4.0 Nm		
Power supply voltage	DC 24 V ± 10 %		
Coil current	0.5 A		
Opening time	70 ms		
Closing time	30 ms		
Highest braking work	150 J		

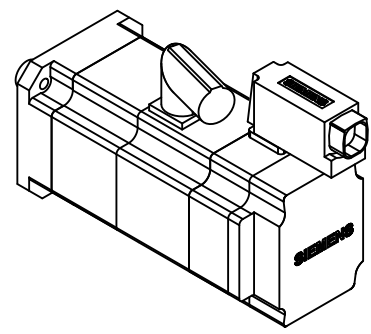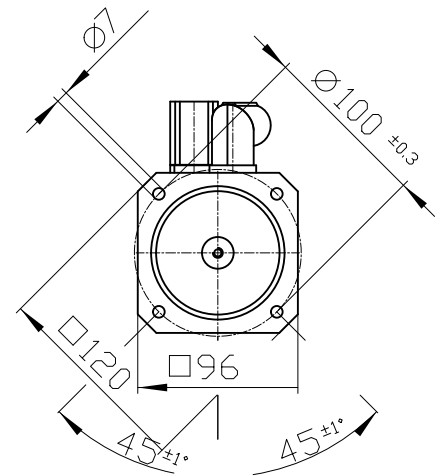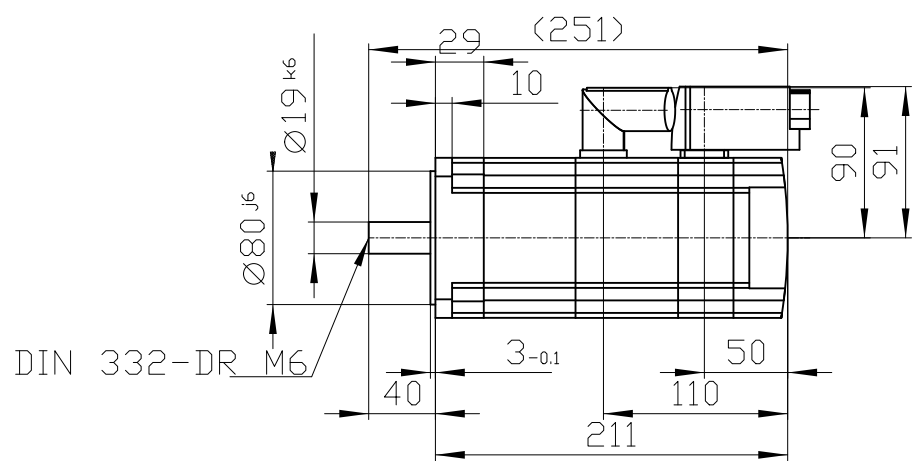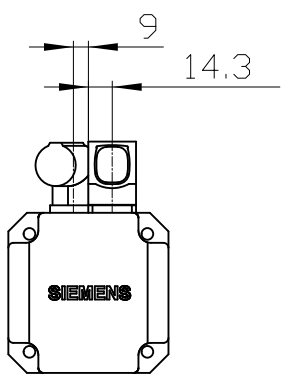

Connector size 1 = M23;
6-pole for power and brake



		-
Unit		mm [in]
Date		3/7/23
SIEMENS AG		1FK7042-5AF 71-1KH0
-		-
		DT

Copyright© Siemens AG 2005
The reproduction or use of this document or its contents is not permitted without express written authority. Siemens AG and its subsidiaries are not liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Copyright© Siemens AG 2005
Confido a titre de secret d'entreprise. Tous droits réservés. Confido como secreto industrial. Nos reservamos todos los derechos. Comunicado como segredo empresarial. Reservados todos os direitos.

Copyright© Siemens AG 2005
Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder der Eintragung.