

No image available for this configuration.

Figure similar

MLFB-Ordering data 1FK7043-7AH71-1FA0




Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data		Mechanical data	
Rated speed (100 K)	4500 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	6	Motor type	High Dynamic
Rated torque (100 K)	2.6 Nm	Shaft height	48
Rated current	4.0 A	Cooling	Natural cooling
Static torque (60 K)	2.50 Nm	Radial runout tolerance	0.040 mm
Static torque (100 K)	3.10 Nm	Concentricity tolerance	0.08 mm
Stall current (60 K)	3.60 A	Axial runout tolerance	0.08 mm
Stall current (100 K)	4.50 A	Vibration severity grade	Grade A
Moment of inertia	1.010 kgcm²	Connector size	1
Efficiency	90.0 %	Degree of protection	IP64
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	0.67 Nm/A	Temperature monitoring	KTY84 temperature sensor in the stator winding
Voltage constant at 20° C	44.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	1.20 Ω	Color of the housing	without
Rotating field inductance	15.0 mH	Holding brake	without holding brake
Electrical time constant	12.50 ms	Shaft end	Feather key
Mechanical time constant	0.81 ms	Encoder system	Encoder AM22DQ: absolute encoder 22 bits (resolution 4194304, encoder-internal 2048 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)
Thermal time constant	40 min		
Shaft torsional stiffness	11000 Nm/rad		
Net weight of the motor	6.3 kg		

MLFB-Ordering data 1FK7043-7AH71-1FA0

Optimum operating point		Recommended Motor Module	
Optimum speed	4500 rpm	Rated inverter current	5 A
Optimum power	1.2 kW	Maximum inverter current	10 A
Limiting data		Maximum torque	6.80 Nm
Max. permissible speed (mech.)	8000 rpm		
Max. permissible speed (inverter)	13100 rpm		
Maximum torque	9.4 Nm		
Maximum current	14.8 A		

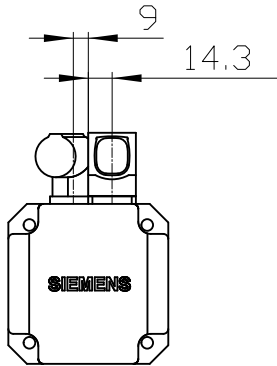

Technical drawing of a square motor. The drawing shows a top view of the motor with a square base and a cylindrical top. The dimensions are as follows:

- Top diameter: $\varnothing 7$
- Outer diameter of the base: $\varnothing 100 \pm 0.3$
- Side length of the square base: 120
- Inner square dimension: 96
- Angle of the base: $45 \pm 1^\circ$

		
Unit	mm (in)	1FK7043-7AH71-1FA0
Date	3/13/23	
SIEMENS AG		
		DT