

Data sheet for SIMOTICS S-1FK7



MLFB-Ordering data 1FK7060-2AC71-1QH0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

| Engineering data            |                                | Mechanical data          |                                                       |
|-----------------------------|--------------------------------|--------------------------|-------------------------------------------------------|
| Rated speed (100 K)         | 2000 rpm                       | Motor type               | Permanent-magnet synchronous motor                    |
| Number of poles             | 8                              | Motor type               | Compact                                               |
| Rated torque (100 K)        | 5.3 Nm                         | Shaft height             | 63                                                    |
| Rated current               | 3.0 A                          | Cooling                  | Natural cooling                                       |
| Static torque (60 K)        | 5.00 Nm                        | Radial runout tolerance  | 0.040 mm                                              |
| Static torque (100 K)       | 6.00 Nm                        | Concentricity tolerance  | 0.10 mm                                               |
| Stall current (60 K)        | 2.55 A                         | Axial runout tolerance   | 0.10 mm                                               |
| Stall current (100 K)       | 3.15 A                         | Vibration severity grade | Grade A                                               |
| Moment of inertia           | 8.700 kgcm²                    | Connector size           | 1                                                     |
| Efficiency                  | 90.0 %                         | Degree of protection     | IP64                                                  |
| Physical constants          |                                | Design acc. to Code I    | IM B5 (IM V1, IM V3)                                  |
| Torque constant             | 1.91 Nm/A                      | Temperature monitoring   | Pt1000 temperature sensor                             |
| Voltage constant at 20° C   | 121.0 V/1000*min <sup>-1</sup> | Electrical connectors    | Connectors for signals and power rotatable            |
| Winding resistance at 20° C | 2.75 Ω                         | Color of the housing     | Standard (Anthracite RAL 7016)                        |
| Rotating field inductance   | 30.5 mH                        | Holding brake            | with holding brake                                    |
| Electrical time constant    | 11.10 ms                       | Shaft end                | Plain shaft                                           |
| Mechanical time constant    | 1.75 ms                        | Encoder system           | Encoder AS20DQI: absolute encoder single-turn 20 bits |
| Thermal time constant       | 30 min                         |                          |                                                       |
| Shaft torsional stiffness   | 28500 Nm/rad                   |                          |                                                       |
| Net weight of the motor     | 8.5 kg                         |                          |                                                       |



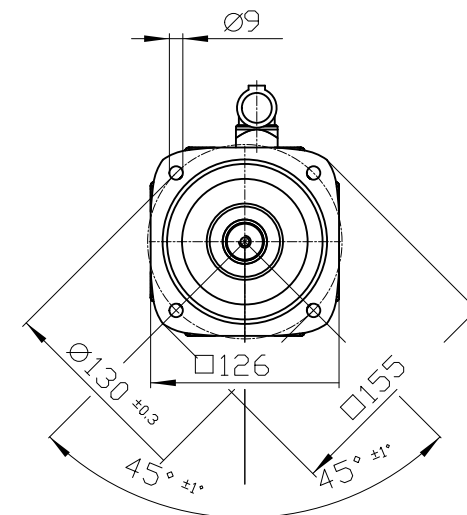


Figure similar

MLFB-Ordering data                    1FK7060-2AC71-1QH0

| Optimum operating point           |                        | Recommended Motor Module |          |
|-----------------------------------|------------------------|--------------------------|----------|
| Optimum speed                     | 2000 rpm               | Rated inverter current   | 3 A      |
| Optimum power                     | 1.1 kW                 | Maximum inverter current | 9 A      |
| Limiting data                     |                        | Maximum torque           | 15.90 Nm |
| Max. permissible speed (mech.)    | 7200 rpm               |                          |          |
| Max. permissible speed (inverter) | 4750 rpm               |                          |          |
| Maximum torque                    | 18.0 Nm                |                          |          |
| Maximum current                   | 10.7 A                 |                          |          |
| Holding brake                     |                        |                          |          |
| Holding brake version             | Permanent-magnet brake |                          |          |
| Holding torque                    | 13.0 Nm                |                          |          |
| Power supply voltage              | DC 24 V ± 10 %         |                          |          |
| Coil current                      | 0.8 A                  |                          |          |
| Opening time                      | 100 ms                 |                          |          |
| Closing time                      | 50 ms                  |                          |          |
| Highest braking work              | 380 J                  |                          |          |

Copyright(C) Siemens AG 2005



10-pole RJ45 socket

