

Data sheet for SIMOTICS S-1FK7



Figure similar

MLFB-Ordering data                      1FK7060-2AH71-1RH0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :




| Engineering data            |                               | Mechanical data          |                                                                                                                                                   |
|-----------------------------|-------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated speed (100 K)         | 4500 rpm                      | Motor type               | Permanent-magnet synchronous motor                                                                                                                |
| Number of poles             | 8                             | Motor type               | Compact                                                                                                                                           |
| Rated torque (100 K)        | 3.7 Nm                        | Shaft height             | 63                                                                                                                                                |
| Rated current               | 4.3 A                         | Cooling                  | Natural cooling                                                                                                                                   |
| Static torque (60 K)        | 5.00 Nm                       | Radial runout tolerance  | 0.040 mm                                                                                                                                          |
| Static torque (100 K)       | 6.00 Nm                       | Concentricity tolerance  | 0.10 mm                                                                                                                                           |
| Stall current (60 K)        | 5.10 A                        | Axial runout tolerance   | 0.10 mm                                                                                                                                           |
| Stall current (100 K)       | 6.30 A                        | Vibration severity grade | Grade A                                                                                                                                           |
| Moment of inertia           | 8.700 kgcm²                   | Connector size           | 1                                                                                                                                                 |
| Efficiency                  | 90.0 %                        | Degree of protection     | IP64                                                                                                                                              |
| Physical constants          |                               | Design acc. to Code I    | IM B5 (IM V1, IM V3)                                                                                                                              |
| Torque constant             | 0.95 Nm/A                     | Temperature monitoring   | Pt1000 temperature sensor                                                                                                                         |
| Voltage constant at 20° C   | 60.5 V/1000*min <sup>-1</sup> | Electrical connectors    | Connectors for signals and power rotatable                                                                                                        |
| Winding resistance at 20° C | 0.69 Ω                        | Color of the housing     | Standard (Anthracite RAL 7016)                                                                                                                    |
| Rotating field inductance   | 7.6 mH                        | Holding brake            | with holding brake                                                                                                                                |
| Electrical time constant    | 10.90 ms                      | Shaft end                | Plain shaft                                                                                                                                       |
| Mechanical time constant    | 1.78 ms                       | Encoder system           | Encoder AM20DQI: absolute encoder 20 bits (resolution 1048576, encoder-internal 512 S/R) + 12 bits multi-turn (traversing range 4096 revolutions) |
| Thermal time constant       | 30 min                        |                          |                                                                                                                                                   |
| Shaft torsional stiffness   | 28500 Nm/rad                  |                          |                                                                                                                                                   |
| Net weight of the motor     | 8.5 kg                        |                          |                                                                                                                                                   |



MLFB-Ordering data                      1FK7060-2AH71-1RH0

| Optimum operating point           |                        | Recommended Motor Module |          |
|-----------------------------------|------------------------|--------------------------|----------|
| Optimum speed                     | 4500 rpm               | Rated inverter current   | 9 A      |
| Optimum power                     | 1.7 kW                 | Maximum inverter current | 27 A     |
| Limiting data                     |                        | Maximum torque           | 18.00 Nm |
| Max. permissible speed (mech.)    | 7200 rpm               |                          |          |
| Max. permissible speed (inverter) | 7200 rpm               |                          |          |
| Maximum torque                    | 18.0 Nm                |                          |          |
| Maximum current                   | 21.5 A                 |                          |          |
| Holding brake                     |                        |                          |          |
| Holding brake version             | Permanent-magnet brake |                          |          |
| Holding torque                    | 13.0 Nm                |                          |          |
| Power supply voltage              | DC 24 V ± 10 %         |                          |          |
| Coil current                      | 0.8 A                  |                          |          |
| Opening time                      | 100 ms                 |                          |          |
| Closing time                      | 50 ms                  |                          |          |
| Highest braking work              | 380 J                  |                          |          |

Copyright(C) Siemens AG 2005

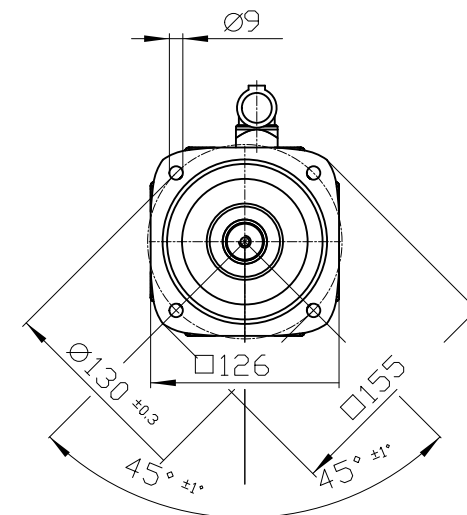

10-pole RJ45 socket

