

Data sheet for SIMOTICS S-1FK7



Figure similar

MLFB-Ordering data

1FK7061-4CF71-1RB0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Engineering data	
Rated speed (100 K)	3000 rpm
Number of poles	6
Rated torque (100 K)	5.4 Nm
Rated current	5.3 A
Static torque (60 K)	5.30 Nm
Static torque (100 K)	6.40 Nm
Stall current (60 K)	4.95 A
Stall current (100 K)	6.10 A
Moment of inertia	5.100 kgcm²
Efficiency	93.0 %
Physical constants	
Torque constant	1.05 Nm/A
Voltage constant at 20° C	67.5 V/1000*min ⁻¹
Winding resistance at 20° C	0.71 Ω
Rotating field inductance	22.0 mH
Electrical time constant	31.00 ms
Mechanical time constant	0.79 ms
Thermal time constant	45 min
Shaft torsional stiffness	26500 Nm/rad
Net weight of the motor	11.0 kg

Mechanical data	
Motor type	Permanent-magnet synchronous motor
Motor type	High Dynamic
Shaft height	63
Cooling	Natural cooling
Radial runout tolerance	0.040 mm
Concentricity tolerance	0.10 mm
Axial runout tolerance	0.10 mm
Vibration severity grade	Grade A
Connector size	1
Degree of protection	IP64
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor
Electrical connectors	Connectors for signals and power rotatable
Color of the housing	Standard (Anthracite RAL 7016)
Holding brake	with holding brake
Shaft end	Feather key
Encoder system	Encoder AM20DQI: absolute encoder 20 bits (resolution 1048576, encoder-internal 512 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)



Figure similar

MLFB-Ordering data 1FK7061-4CF71-1RB0






Optimum operating point		Recommended Motor Module	
Optimum speed	3000 rpm	Rated inverter current	9 A
Optimum power	1.7 kW	Maximum inverter current	27 A
Limiting data		Maximum torque	17.30 Nm
Max. permissible speed (mech.)	7500 rpm		
Max. permissible speed (inverter)	7500 rpm		
Maximum torque	17.3 Nm		
Maximum current	18.5 A		
Holding brake			
Holding brake version	Permanent-magnet brake		
Holding torque	13.0 Nm		
Power supply voltage	DC 24 V ± 10 %		
Coil current	0.8 A		
Opening time	100 ms		
Closing time	50 ms		
Highest braking work	380 J		

Copyright© Siemens AG 2005
Cod-drawing do not make any manual changes


The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder Gk-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves. Confido como secreto industrial. Nos reservamos todos los derechos. Comunicado como segredo empresarial. Reservados todos os direitos.

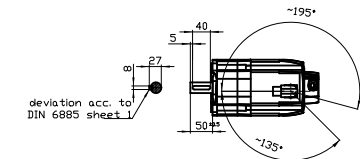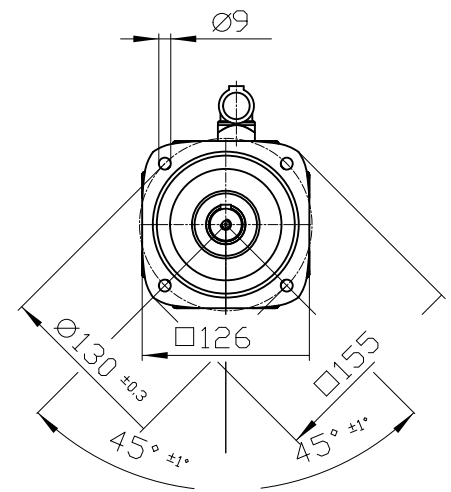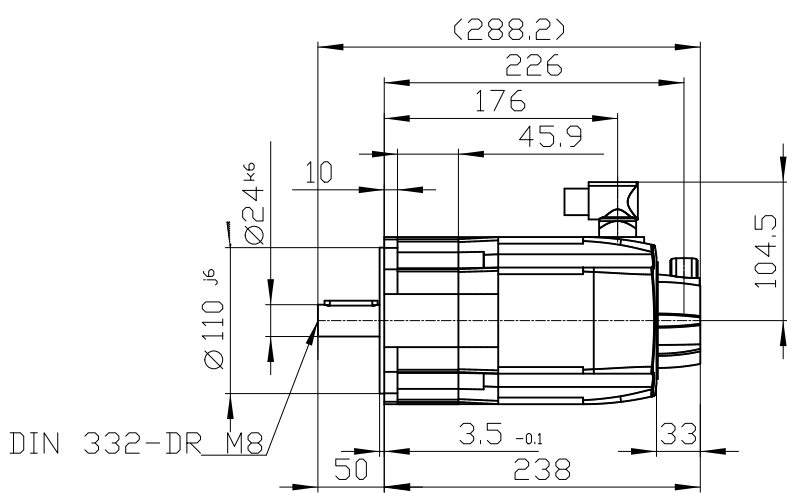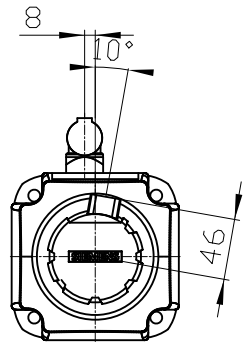

Connector size 1 = M23;
6-pole for power and brake

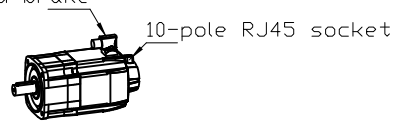

Unit	mm [in]	1FK7061-4CF 71-1RB0	
Date	3/24/23		
SIEMENS AG			
		DT	