

Data sheet for SIMOTICS S-1FK7



MLFB-Ordering data                      1FK7062-2AC71-1CA0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

| Engineering data            |                                | Mechanical data          |                                                                                                                                                     |
|-----------------------------|--------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated speed (100 K)         | 2000 rpm                       | Motor type               | Permanent-magnet synchronous motor                                                                                                                  |
| Number of poles             | 8                              | Motor type               | Compact                                                                                                                                             |
| Rated torque (100 K)        | 7.0 Nm                         | Shaft height             | 63                                                                                                                                                  |
| Rated current               | 2.6 A                          | Cooling                  | Natural cooling                                                                                                                                     |
| Static torque (60 K)        | 7.10 Nm                        | Radial runout tolerance  | 0.040 mm                                                                                                                                            |
| Static torque (100 K)       | 8.50 Nm                        | Concentricity tolerance  | 0.10 mm                                                                                                                                             |
| Stall current (60 K)        | 2.45 A                         | Axial runout tolerance   | 0.10 mm                                                                                                                                             |
| Stall current (100 K)       | 3.00 A                         | Vibration severity grade | Grade A                                                                                                                                             |
| Moment of inertia           | 11.200 kgcm <sup>2</sup>       | Connector size           | 1                                                                                                                                                   |
| Efficiency                  | 90.0 %                         | Degree of protection     | IP64                                                                                                                                                |
| Physical constants          |                                | Design acc. to Code I    | IM B5 (IM V1, IM V3)                                                                                                                                |
| Torque constant             | 2.83 Nm/A                      | Temperature monitoring   | Pt1000 temperature sensor                                                                                                                           |
| Voltage constant at 20° C   | 180.5 V/1000*min <sup>-1</sup> | Electrical connectors    | Connectors for signals and power rotatable                                                                                                          |
| Winding resistance at 20° C | 3.59 Ω                         | Color of the housing     | Standard (Anthracite RAL 7016)                                                                                                                      |
| Rotating field inductance   | 45.5 mH                        | Holding brake            | without holding brake                                                                                                                               |
| Electrical time constant    | 12.70 ms                       | Shaft end                | Feather key                                                                                                                                         |
| Mechanical time constant    | 1.51 ms                        | Encoder system           | Encoder AM24DQI: absolute encoder 24 bits (resolution 16777216, encoder-internal 2048 S/R) + 12 bits multi-turn (traversing range 4096 revolutions) |
| Thermal time constant       | 35 min                         |                          |                                                                                                                                                     |
| Shaft torsional stiffness   | 37000 Nm/rad                   |                          |                                                                                                                                                     |
| Net weight of the motor     | 9.1 kg                         |                          |                                                                                                                                                     |



Figure similar

MLFB-Ordering data                      1FK7062-2AC71-1CA0






| Optimum operating point           |          | Recommended Motor Module |          |
|-----------------------------------|----------|--------------------------|----------|
| Optimum speed                     | 2000 rpm | Rated inverter current   | 3 A      |
| Optimum power                     | 1.5 kW   | Maximum inverter current | 9 A      |
| Limiting data                     |          | Maximum torque           | 22.90 Nm |
| Max. permissible speed (mech.)    | 7200 rpm |                          |          |
| Max. permissible speed (inverter) | 3200 rpm |                          |          |
| Maximum torque                    | 26.0 Nm  |                          |          |
| Maximum current                   | 10.9 A   |                          |          |

Copyright© Siemens AG 2005  
Cod-drawing do not make any  
manual changes


The reproduction or use of this document or its  
contents is not permitted without express written authority.  
Offenders will be liable for damages. All rights, including rights  
created by patent grant or registration of a utility model or design,  
are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwer-  
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht  
ausdrücklich zugestanden. Zuwiderhandlungen verpflichten  
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer  
den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves.  
Confido como secreto industrial. No reservamos todos los derechos  
Comunicado como segredo empresarial. Reservados todos os direitos

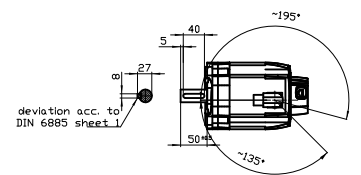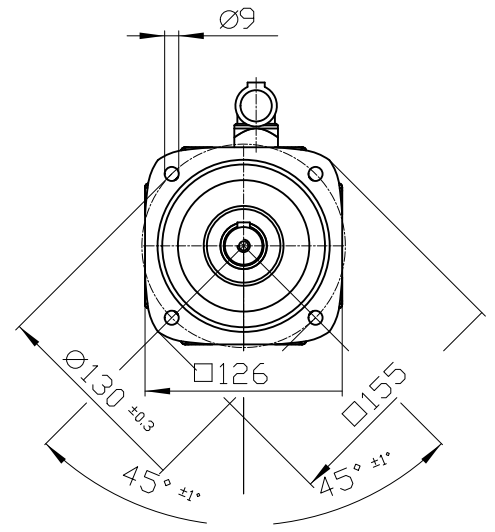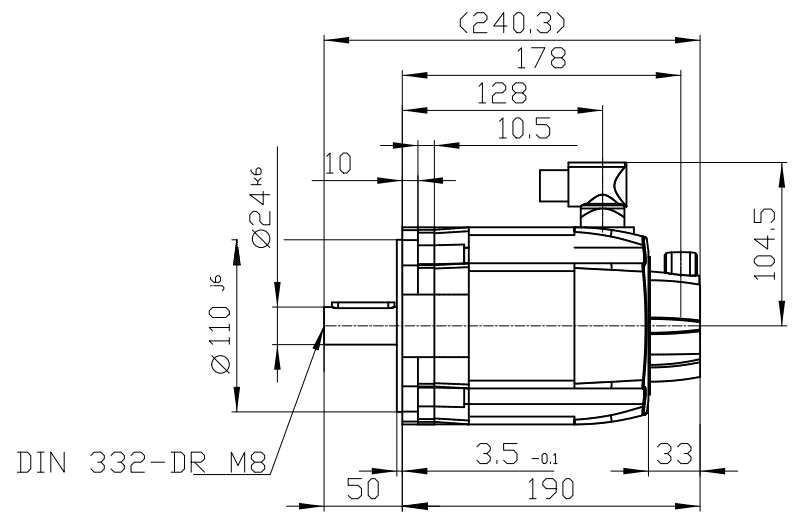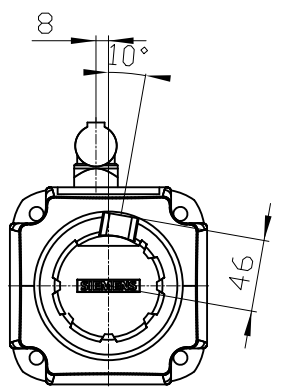

Connector size 1 = M23;  
6-pole for power and brake

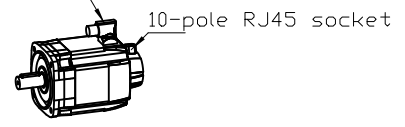

|            |         |                    |
|------------|---------|--------------------|
|            |         | -                  |
|            |         | -                  |
| Unit       | mm [in] | 1FK7062-2AC71-1CA0 |
| Date       | 3/23/23 |                    |
| SIEMENS AG |         | -                  |
| -          |         | DT                 |