

Data sheet for SIMOTICS S-1FK7



Figure similar

MLFB-Ordering data 1FK7063-2AF71-1RB2

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data		Mechanical data	
Rated speed (100 K)	3000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	8	Motor type	Compact
Rated torque (100 K)	7.3 Nm	Shaft height	63
Rated current	5.6 A	Cooling	Natural cooling
Static torque (60 K)	9.10 Nm	Radial runout tolerance	0.040 mm
Static torque (100 K)	11.00 Nm	Concentricity tolerance	0.10 mm
Stall current (60 K)	6.50 A	Axial runout tolerance	0.10 mm
Stall current (100 K)	8.00 A	Vibration severity grade	Grade A
Moment of inertia	15.700 kgcm²	Connector size	1
Efficiency	91.0 %	Degree of protection	IP65 and DE flange IP67
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	1.37 Nm/A	Temperature monitoring	Pt1000 temperature sensor
Voltage constant at 20° C	90.5 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	0.64 Ω	Color of the housing	Standard (Anthracite RAL 7016)
Rotating field inductance	8.5 mH	Holding brake	with holding brake
Electrical time constant	13.40 ms	Shaft end	Feather key
Mechanical time constant	1.48 ms	Encoder system	Encoder AM20DQI: absolute encoder 20 bits (resolution 1048576, encoder-internal 512 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)
Thermal time constant	40 min		
Shaft torsional stiffness	25000 Nm/rad		
Net weight of the motor	12.5 kg		



MLFB-Ordering data 1FK7063-2AF71-1RB2





Optimum operating point		Recommended Motor Module	
Optimum speed	3000 rpm	Rated inverter current	9 A
Optimum power	2.3 kW	Maximum inverter current	27 A
Limiting data		Maximum torque	34.00 Nm
Max. permissible speed (mech.)	7200 rpm		
Max. permissible speed (inverter)	6400 rpm		
Maximum torque	35.0 Nm		
Maximum current	28.0 A		
Holding brake			
Holding brake version	Permanent-magnet brake		
Holding torque	13.0 Nm		
Power supply voltage	DC 24 V ± 10 %		
Coil current	0.8 A		
Opening time	100 ms		
Closing time	50 ms		
Highest braking work	380 J		

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes



The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves.
Confido como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

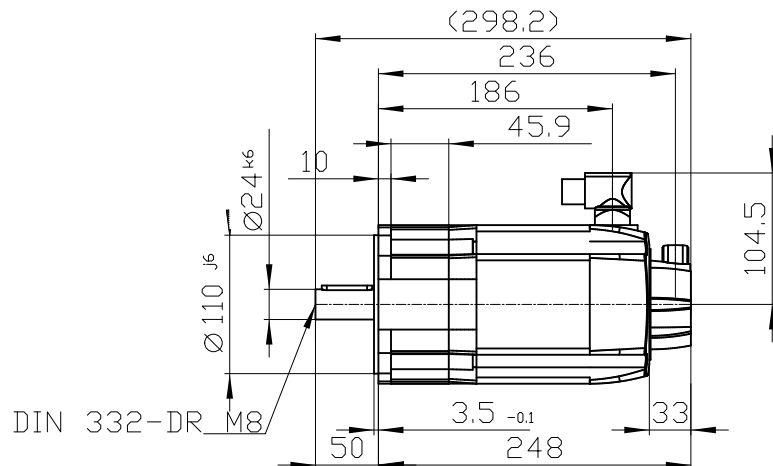

Connector size 1 = M23;
6-pole for power and brake

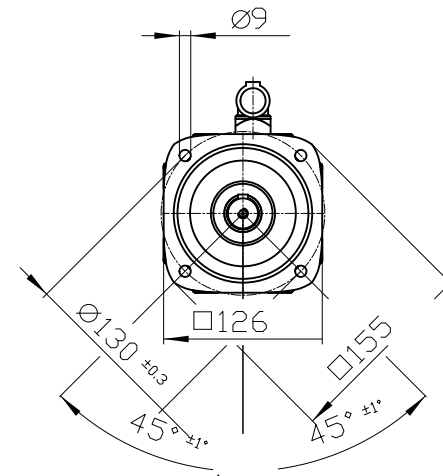

Unit	mm [in]	1FK7063-2AF71-1RB2	
Date	8/1/23		
SIEMENS AG			
		DT	