

Data sheet for SIMOTICS S-1FK7

MLFB-Ordering data 1FK7064-7AF71-1AA0







Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data		Mechanical data	
Rated speed (100 K)	3000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	6	Motor type	High Dynamic
Rated torque (100 K)	8.0 Nm	Shaft height	63
Rated current	7.5 A	Cooling	Natural cooling
Static torque (60 K)	9.00 Nm	Radial runout tolerance	0.040 mm
Static torque (100 K)	12.00 Nm	Concentricity tolerance	0.10 mm
Stall current (60 K)	8.50 A	Axial runout tolerance	0.10 mm
Stall current (100 K)	11.00 A	Vibration severity grade	Grade A
Moment of inertia	6.500 kgcm²	Connector size	1
Efficiency	93.0 %	Degree of protection	IP64
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	1.03 Nm/A	Temperature monitoring	KTY84 temperature sensor in the stator winding
Voltage constant at 20° C	68.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	0.35 Ω	Color of the housing	without
Rotating field inductance	10.7 mH	Holding brake	without holding brake
Electrical time constant	30.50 ms	Shaft end	Feather key
Mechanical time constant	0.64 ms	Encoder system	Encoder IC2048S/R: incremental encoder sin/cos 1 Vpp 2048 S/R with C and D track
Thermal time constant	55 min		
Shaft torsional stiffness	30000 Nm/rad		
Net weight of the motor	15.5 kg		

MLFB-Ordering data 1FK7064-7AF71-1AA0

Optimum operating point		Recommended Motor Module	
Optimum speed	3000 rpm	Rated inverter current	18 A
Optimum power	2.5 kW	Maximum inverter current	36 A
Limiting data		Maximum torque	32.00 Nm
Max. permissible speed (mech.)	6000 rpm		
Max. permissible speed (inverter)	8500 rpm		
Maximum torque	32.0 Nm		
Maximum current	31.0 A		

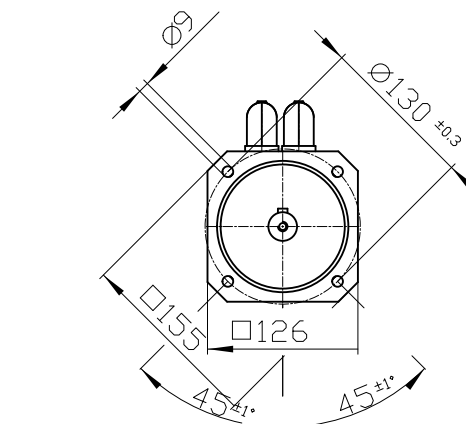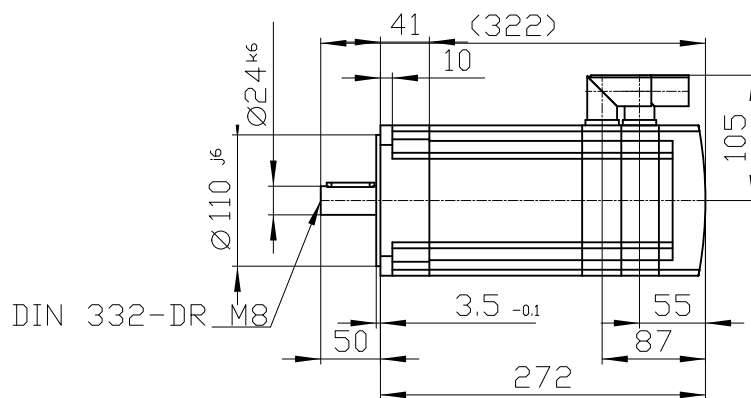

Connector size 1 = M23;
6-pole for power and brake

Connector size M23, 17-pole

		
Unit	mm [in]	1FK7064-7AF71-1AA0
Date	12/20/22	
SIEMENS AG		
-		DT