

Data sheet for SIMOTICS S-1FK7



MLFB-Ordering data 1FK7080-2AF71-1CH0

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data		Mechanical data	
Rated speed (100 K)	3000 rpm	Motor type	Permanent-magnet synchronous motor
Number of poles	8	Motor type	Compact
Rated torque (100 K)	6.8 Nm	Shaft height	80
Rated current	4.4 A	Cooling	Natural cooling
Static torque (60 K)	6.60 Nm	Radial runout tolerance	0.050 mm
Static torque (100 K)	8.00 Nm	Concentricity tolerance	0.10 mm
Stall current (60 K)	4.00 A	Axial runout tolerance	0.10 mm
Stall current (100 K)	4.90 A	Vibration severity grade	Grade A
Moment of inertia	17.500 kgcm ²	Connector size	1
Efficiency	92.0 %	Degree of protection	IP64
Physical constants		Design acc. to Code I	IM B5 (IM V1, IM V3)
Torque constant	1.61 Nm/A	Temperature monitoring	Pt1000 temperature sensor
Voltage constant at 20° C	105.0 V/1000*min ⁻¹	Electrical connectors	Connectors for signals and power rotatable
Winding resistance at 20° C	0.98 Ω	Color of the housing	Standard (Anthracite RAL 7016)
Rotating field inductance	17.2 mH	Holding brake	with holding brake
Electrical time constant	17.50 ms	Shaft end	Plain shaft
Mechanical time constant	1.52 ms	Encoder system	Encoder AM24DQI: absolute encoder 24 bits (resolution 16777216, encoder-internal 2048 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)
Thermal time constant	40 min		
Shaft torsional stiffness	81000 Nm/rad		
Net weight of the motor	13.3 kg		



Figure similar

MLFB-Ordering data 1FK7080-2AF71-1CH0




Optimum operating point		Recommended Motor Module	
Optimum speed	3000 rpm	Rated inverter current	5 A
Optimum power	2.1 kW	Maximum inverter current	15 A
Limiting data		Maximum torque	22.10 Nm
Max. permissible speed (mech.)	6000 rpm		
Max. permissible speed (inverter)	5500 rpm		
Maximum torque	25.0 Nm		
Maximum current	18.0 A		
Holding brake			
Holding brake version	Permanent-magnet brake		
Holding torque	22.0 Nm		
Power supply voltage	DC 24 V ± 10 %		
Coil current	0.9 A		
Opening time	200 ms		
Closing time	60 ms		
Highest braking work	1400 J		

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes


The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Weitergabe sole Vervielfältigung dieser Unterlage. Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwahlhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder Gk-Entragung.



Confie a titre de secret d'entreprise. Tous droits reserves.
Confido como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

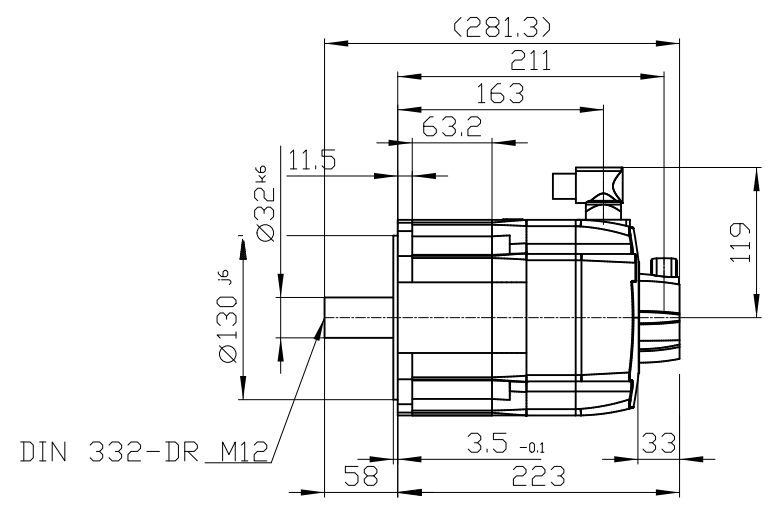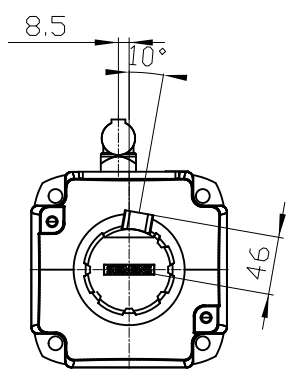

DIN 332-DR M12



Connector size 1 = M23;
6-pole for power and brake

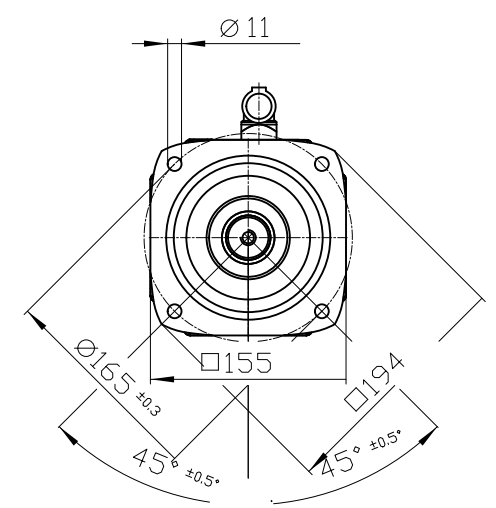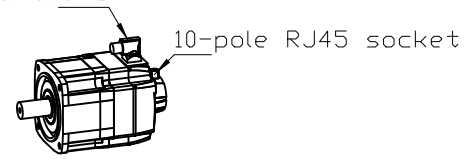

	-	
	-	
Unit	mm [in]	1FK7080-2AF 71-1CH0
Date	8/1/23	
SIEMENS AG		-
-		DT