

Data sheet for SIMOTICS S-1FK7



Figure similar

MLFB-Ordering data

1FK7085-4CC71-1CG0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Engineering data	
Rated speed (100 K)	2000 rpm
Number of poles	8
Rated torque (100 K)	15.0 Nm
Rated current	10.0 A
Static torque (60 K)	18.30 Nm
Static torque (100 K)	22.00 Nm
Stall current (60 K)	10.90 A
Stall current (100 K)	13.50 A
Moment of inertia	22.000 kgcm²
Efficiency	92.0 %
Physical constants	
Torque constant	1.63 Nm/A
Voltage constant at 20° C	105.0 V/1000*min ⁻¹
Winding resistance at 20° C	0.31 Ω
Rotating field inductance	9.8 mH
Electrical time constant	31.50 ms
Mechanical time constant	0.77 ms
Thermal time constant	45 min
Shaft torsional stiffness	84000 Nm/rad
Net weight of the motor	23.0 kg

Mechanical data	
Motor type	Permanent-magnet synchronous motor
Motor type	High Dynamic
Shaft height	80
Cooling	Natural cooling
Radial runout tolerance	0.050 mm
Concentricity tolerance	0.10 mm
Axial runout tolerance	0.10 mm
Vibration severity grade	Grade A
Connector size	1
Degree of protection	IP64
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor
Electrical connectors	Connectors for signals and power rotatable
Color of the housing	Standard (Anthracite RAL 7016)
Holding brake	without holding brake
Shaft end	Plain shaft
Encoder system	Encoder AM24DQI: absolute encoder 24 bits (resolution 16777216, encoder-internal 2048 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)



MLFB-Ordering data 1FK7085-4CC71-1CG0






Optimum operating point		Recommended Motor Module	
Optimum speed	2000 rpm	Rated inverter current	18 A
Optimum power	3.1 kW	Maximum inverter current	54 A
Limiting data		Maximum torque	65.00 Nm
Max. permissible speed (mech.)	6000 rpm		
Max. permissible speed (inverter)	5500 rpm		
Maximum torque	65.0 Nm		
Maximum current	51.0 A		

Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos


Weitergabe sowie Vervielfältigung dieser Unterlage. Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder der Eintragung.

The reproduction or use of this document or its
contents is not permitted without express written authority.
Offenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Copyright© Siemens AG 2005
Cada-drawing do not make any
manual changes

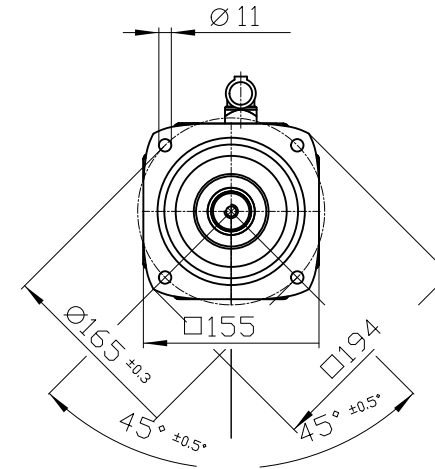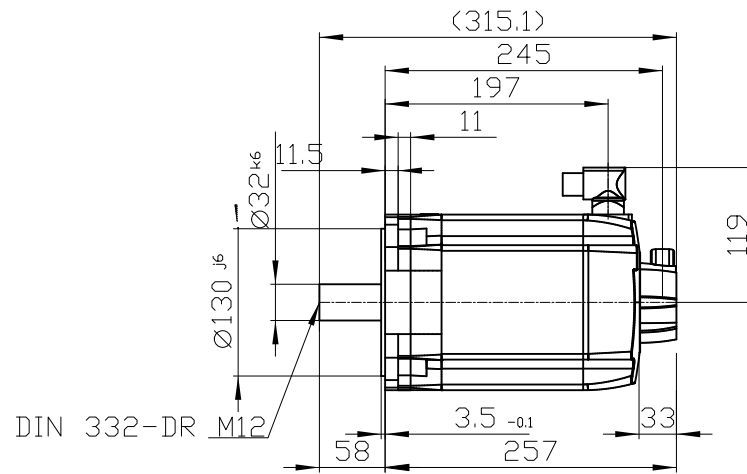

Connector size 1 = M23;
6-pole for power and brake

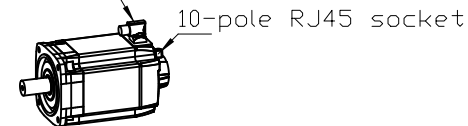

		-
Unit		mm [in]
Date		4/13/23
SIEMENS AG		1FK7085-4CC71-1CG0
-		-
		DT