

Data sheet for SIMOTICS S-1FK7



Figure similar

MLFB-Ordering data

1FK7105-2AF71-1CG0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Engineering data	
Rated speed (100 K)	3000 rpm
Number of poles	8
Rated torque (100 K)	26.0 Nm
Rated current	18.0 A
Static torque (60 K)	40.00 Nm
Static torque (100 K)	48.00 Nm
Stall current (60 K)	25.00 A
Stall current (100 K)	31.00 A
Moment of inertia	154.000 kgcm²
Efficiency	94.0 %
Physical constants	
Torque constant	1.55 Nm/A
Voltage constant at 20° C	102.0 V/1000*min ⁻¹
Winding resistance at 20° C	0.07 Ω
Rotating field inductance	1.9 mH
Electrical time constant	26.00 ms
Mechanical time constant	1.40 ms
Thermal time constant	70 min
Shaft torsional stiffness	125000 Nm/rad
Net weight of the motor	39.0 kg

Mechanical data	
Motor type	Permanent-magnet synchronous motor
Motor type	Compact
Shaft height	100
Cooling	Natural cooling
Radial runout tolerance	0.050 mm
Concentricity tolerance	0.10 mm
Axial runout tolerance	0.10 mm
Vibration severity grade	Grade A
Connector size	1.5
Degree of protection	IP64
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor
Electrical connectors	Connectors for signals and power rotatable
Color of the housing	Standard (Anthracite RAL 7016)
Holding brake	without holding brake
Shaft end	Plain shaft
Encoder system	Encoder AM24DQI: absolute encoder 24 bits (resolution 16777216, encoder-internal 2048 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)



Figure similar

MLFB-Ordering data 1FK7105-2AF71-1CG0






Optimum operating point		Recommended Motor Module	
Optimum speed	3000 rpm	Rated inverter current	30 A
Optimum power	8.2 kW	Maximum inverter current	90 A
Limiting data		Maximum torque	129.70 Nm
Max. permissible speed (mech.)	5000 rpm		
Max. permissible speed (inverter)	5000 rpm		
Maximum torque	150.0 Nm		
Maximum current	109.0 A		

Copyright© Siemens AG 2005
Cod-drawing do not make any manual changes


The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves. Confido como secreto industrial. Nos reservamos todos los derechos. Comunicado como segredo empresarial. Reservados todos os direitos.

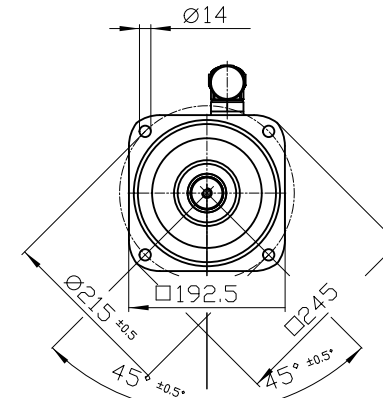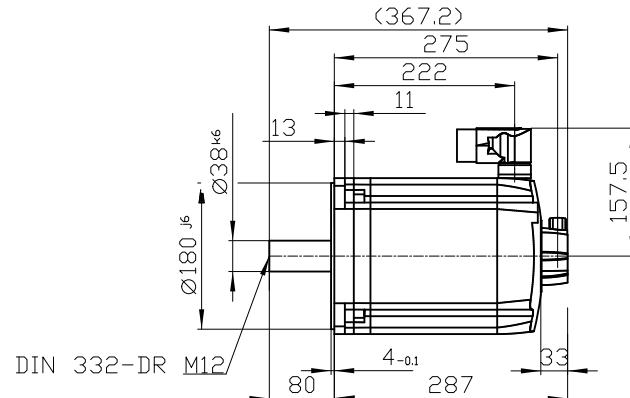

Connector size 1.5 = M40;
6-pole for power and brake

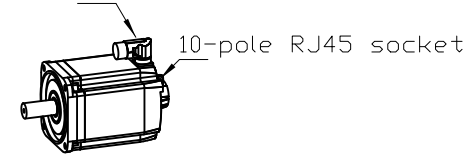

	Unit	mm [in]	1FK7105-2AF 71-1CG0
	Date	7/28/23	
SIEMENS AG		-	
-		DT	