

Data sheet for SIMOTICS S-1FK7



Figure similar

MLFB-Ordering data

1FK7105-3BC71-1CA0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Engineering data	
Rated speed (100 K)	2000 rpm
Number of poles	8
Rated torque (100 K)	37.0 Nm
Rated current	16.0 A
Static torque (60 K)	40.00 Nm
Static torque (100 K)	48.00 Nm
Stall current (60 K)	16.20 A
Stall current (100 K)	20.00 A
Moment of inertia	249.000 kgcm²
Efficiency	93.0 %
Physical constants	
Torque constant	2.37 Nm/A
Voltage constant at 20° C	157.5 V/1000*min ⁻¹
Winding resistance at 20° C	0.17 Ω
Rotating field inductance	4.5 mH
Electrical time constant	25.50 ms
Mechanical time constant	2.33 ms
Thermal time constant	70 min
Shaft torsional stiffness	125000 Nm/rad
Net weight of the motor	44.4 kg

Mechanical data	
Motor type	Permanent-magnet synchronous motor
Motor type	High Inertia
Shaft height	100
Cooling	Natural cooling
Radial runout tolerance	0.050 mm
Concentricity tolerance	0.10 mm
Axial runout tolerance	0.10 mm
Vibration severity grade	Grade A
Connector size	1.5
Degree of protection	IP64
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor
Electrical connectors	Connectors for signals and power rotatable
Color of the housing	Standard (Anthracite RAL 7016)
Holding brake	without holding brake
Shaft end	Feather key
Encoder system	Encoder AM24DQI: absolute encoder 24 bits (resolution 16777216, encoder-internal 2048 S/R) + 12 bits multi-turn (traversing range 4096 revolutions)



MLFB-Ordering data 1FK7105-3BC71-1CA0






Optimum operating point		Recommended Motor Module	
Optimum speed	2000 rpm	Rated inverter current	30 A
Optimum power	7.7 kW	Maximum inverter current	72 A
Limiting data		Maximum torque	150.00 Nm
Max. permissible speed (mech.)	5000 rpm		
Max. permissible speed (inverter)	3650 rpm		
Maximum torque	150.0 Nm		
Maximum current	71.0 A		

Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos


Weitergabe sowie Vervielfältigung dieser Unterlage. Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder Gk-Entragung.

The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Copyright© Siemens AG 2005
Cada-drawing do not make any
manual changes

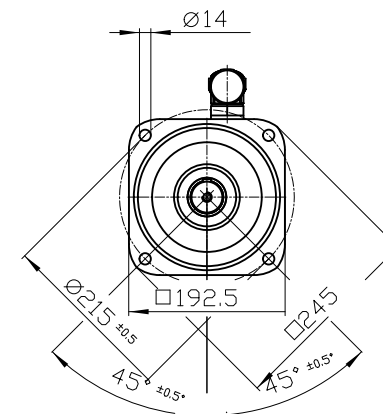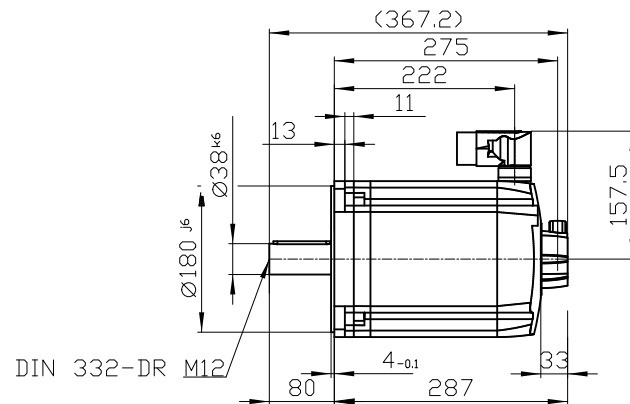

Connector size 1.5 = M40;
6-pole for power and brake



Unit	mm [in]	1FK7105-3BC71-1CA0	
Date	7/6/23		
SIEMENS AG			
		DT	