

Data sheet for SIMOTICS S-1FL6

MLFB-Ordering data 1FL6066-1AC61-0AG1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data	
Rated speed	2000 rpm
Rated torque (100 K)	8.36 Nm
Rated current	5.3 A
Rated power	1.75 kW / 2.38 hp
Max. speed	3000 rpm
Maximum torque	25.10 Nm
Max. current	15.9 A
Static torque	11.00 Nm
Moment of inertia	22.600 kgcm²
Physical constants	
Torque constant	1.70 Nm/A
Thermal class	B (130 °C)
Net weight	11.00 kg
Ambient conditions	
Ambient temperature	
Operation	0 ... 40 °C
Relative humidity	
Max. operation	90 % RH maximum (no condensation at 30 °C)
Standards	
Compliance with standards	CE, EAC

Mechanical data	
Motor type	High Inertia
Motor type	Permanent-magnet synchronous motor
Shaft height	65
Encoder system	Incremental encoder TTL, 2500 S/R (13 bit)
Cooling	Natural cooling
Shaft end	Plain shaft
Radial runout tolerance	Class N
Vibration severity grade	Grade A
Degree of protection	IP65
Design acc. to Code I	IM B5 (IM V1, IM V3)
Connection type	Straight connector (fixed cable outlet direction)



Figure similar

Article No. : 1FL6066-1AC61-0AG1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data	
Rated speed	2,000 rpm
Rated torque (100 K)	8.36 Nm
Rated current	5.3 A
Rated power	1.75 kW / 2.38 hp
Max. speed	3,000 rpm
Maximum torque	25.10 Nm
Max. current	15.9 A
Static torque	11.00 Nm
Moment of inertia	22.600 kgcm²

Physical constants	
Torque constant	1.70 Nm/A
Thermal class	B (130 °C)
Net weight	11.00 kg

Ambient conditions	
Ambient temperature	
Operation	0 ... 40 °C
Relative humidity	
Max. operation	90 % RH maximum (no condensation at 30 °C)

Standards	
Compliance with standards	CE, EAC






Mechanical data	
Motor type	High Inertia
Motor type	Permanent-magnet synchronous motor
Shaft height	65
Encoder system	Incremental encoder TTL, 2500 S/R (13 bit)
Cooling	Natural cooling
Shaft end	Plain shaft
Radial runout tolerance	Class N
Vibration severity grade	Grade A
Degree of protection	IP65
Design acc. to Code I	IM B5 (IM V1, IM V3)
Connection type	Straight connector (fixed cable outlet direction)

Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfältigung dieser Unterlage. Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder Gk-Entragung.

The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes

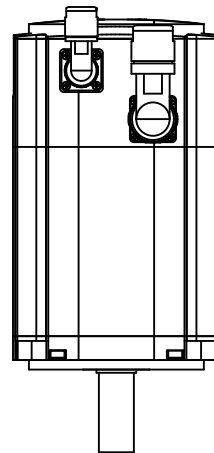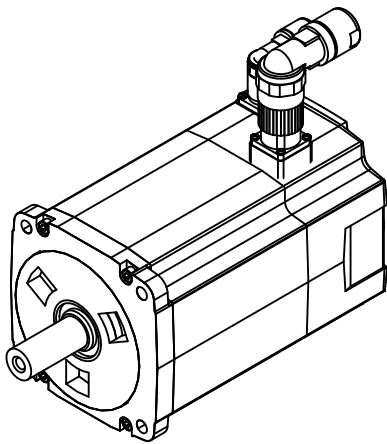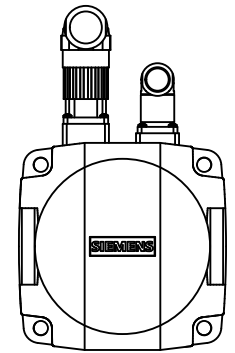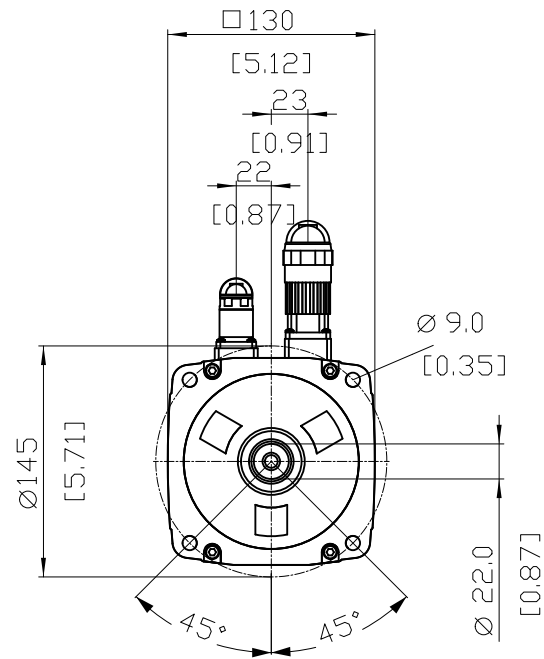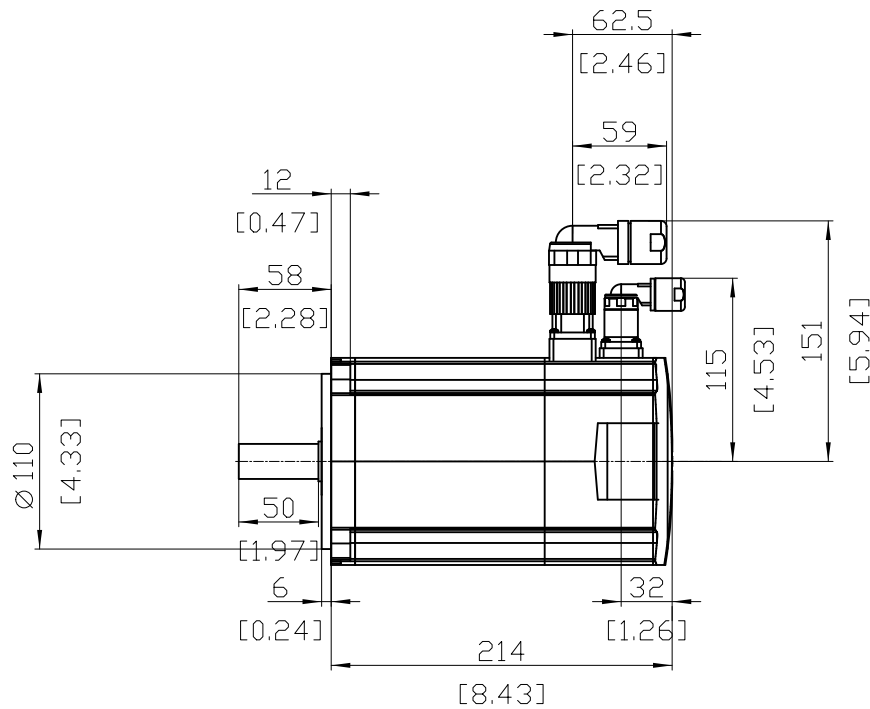

	-	
	-	
Unit	mm [in]	1FL6066-1AC61-0AG1
Date	5/23/23	
SIEMENS AG		-
-		DT