



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8083-1DG12-0GG1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	4.1	17.0	11.3	332	80.0	2,300	45	24.0	10,000	21.0	12	0.852	0.780	5.7
	BLM/SLM 400V	3.7	18.0	11.6	293	70.2	2,000	45	24.0	10,000	21.0	12	0.832	0.790	5.7
	ALM/BLM/SLM 480V	4.6	17.0	11.2	376	91.6	2,650	45	24.0	10,000	21.0	12	0.862	0.780	5.7

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	80
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Plain shaft
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

1 AC 230 V / 50 Hz (±10%)	0.33 A
1 AC 230 V / 60 Hz (±10%)	0.25 A
1 AC 265 V / 60 Hz (±10%)	0.32 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	10 min
Moment of inertia	64 kgcm ²
Weight (approx.)	32 kg

Connection

Type of electrical connection	Power connector
Position of the connection	Power connector, top
Power connection	NDE
Signal connection	left

Cooling data and sound pressure level





Airflow, min.	0.02 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	95 Pa

Confie a titre de secret d'entreprise. Tous droits reserves.
Confidado como secreto Industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfaeltigung dieser Unterlage. Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdruecklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GR-Eintragung.

The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes

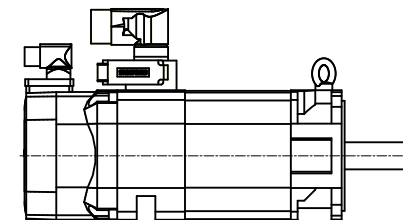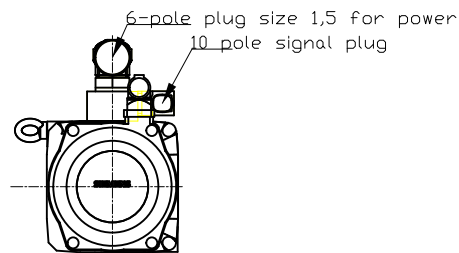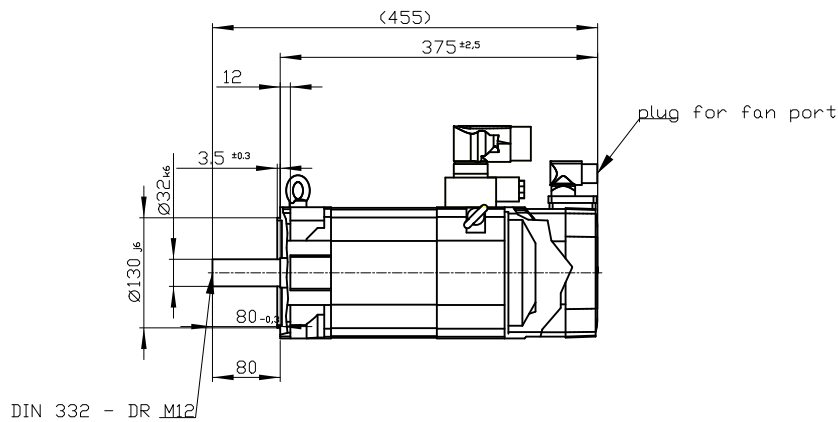

Type of construction: IM B5 (IM V1, IM V3) / Type of protection: IP55

		-	
		-	
Terminal box	-	1PH8083-1DG12-0GG1	
Weight	32 kg		
Unit	mm (in)		
Date	4/24/23		
SIEMENS AG			
not toleranced dimensions: ± 1		DT	