



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8087-1DN12-0GF1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	6.5	12.0	19.5	335	169.0	5,000	65	66.0	10,000	25.0	28	0.878	0.730	10.4
	BLM/SLM 400V	5.8	12.0	19.5	315	152.1	4,500	65	66.0	10,000	25.0	28	0.871	0.700	11.0
	ALM/BLM/SLM 480V	6.9	12.0	19.0	370	185.6	5,500	65	66.0	10,000	25.0	28	0.878	0.710	10.5

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	80
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Plain shaft
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

1 AC 230 V / 50 Hz (±10%)	0.33 A
1 AC 230 V / 60 Hz (±10%)	0.25 A
1 AC 265 V / 60 Hz (±10%)	0.32 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	10 min
Moment of inertia	89 kgcm ²
Weight (approx.)	39 kg

Connection

Type of electrical connection	Power connector
Position of the connection	Power connector, top
Power connection	left
Signal connection	DE

Cooling data and sound pressure level





Airflow, min.	0.02 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	95 Pa

Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfältigung dieser Unterlage. Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes

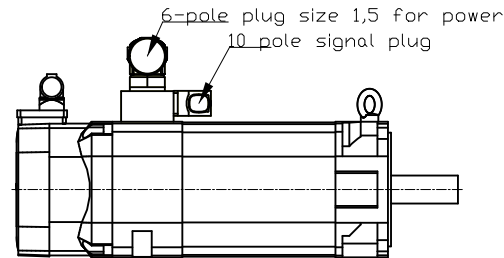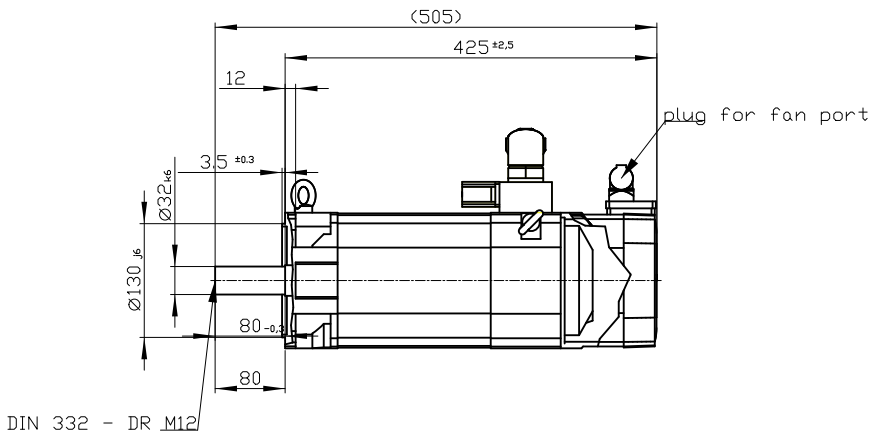

Type of construction: IM B5 (IM V1, IM V3) / Type of protection: IP55

			
Terminal box		-	1PH8087-1DN12-0GF1
Weight		39 kg	
Unit		mm (in)	
Date		4/25/23	
SIEMENS AG			
not toleranced dimensions: ± 1			
		DT	