

Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8107-1DF02-0CE1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	10.0	55.0	22.0	380	60.4	1,750	135	54.0	9,000	63.0	25	0.878	0.800	10.9
	BLM/SLM 400V	9.0	57.0	23.5	330	52.2	1,500	135	54.0	9,000	63.0	25	0.869	0.810	10.8
	ALM/BLM/SLM 480V	11.0	53.0	21.5	428	68.6	2,000	135	54.0	9,000	63.0	25	0.901	0.790	10.8

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	100
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	S/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard with fixed bearing
Shaft end	Plain shaft
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.13 A
3 AC 400 V / 60 Hz (±10%)	0.09 A
3 AC 480 V / 60 Hz (±10%)	0.13 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	20 min
Moment of inertia	289 kgcm ²
Weight (approx.)	73 kg

Connection

Type of electrical connection	Power connector
Position of the connection	Power connector, top
Power connection	right
Signal connection	DE

Cooling data and sound pressure level



Airflow, min.	0.04 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	110 Pa

Copyright© Siemens AG 2005
Cod-drawing do not make any manual changes




The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder GK-Entragung.

Confide a titre de secret d'entreprise. Tous droits reserves. Confido como secreto industrial. Nos reservamos todos los derechos Comunicado como segredo empresarial. Reservados todos os direitos

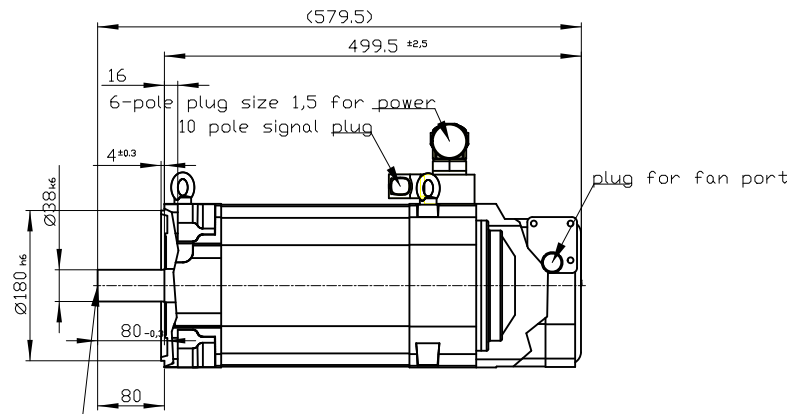

DIN 332 - DR M12

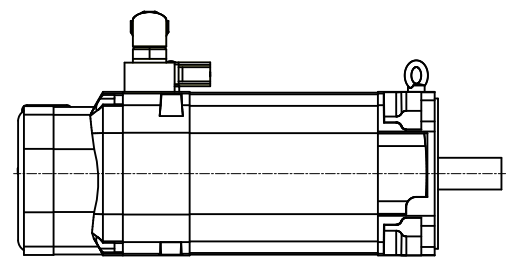

Type of construction IM B5 (IM V1, IM V3)		/ Type of protection IP55	
		—	
Terminal box		—	
Weight 73 kg		1PH8107-1DF02-0CE1	
Unit mm [in]			
Date 4/13/23			
SIEMENS AG		—	
not toleranced dimensions: ± 1		DT	