



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8107-1DF22-1BA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	15.5	85.0	42.0	314	61.4	1,750	180	89.0	9,000	94.0	44	0.847	0.830	17.5
	BLM/SLM 400V	14.0	89.0	43.7	277	53.3	1,500	180	89.0	9,000	94.0	44	0.829	0.830	17.8
	ALM/BLM/SLM 480V	18.0	86.0	42.6	363	69.7	2,000	180	89.0	9,000	94.0	44	0.873	0.810	19.1

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	100
Cooling	Water cooling
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP65
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard with fixed bearing
Shaft end	Feather key with full key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

Physical constants

Thermal time constant	10 min
Moment of inertia	289 kgcm ²
Weight (approx.)	83 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk823

Cooling data and sound pressure level

Flow rate, min.	8 l/min
Sound pressure level L _{pA} (1m) motor rated load, tolerance + 3dB	68 dB ¹⁾
Pressure drop	0.4 bar
NDE thread connection	0.25 Inches

Cooling water specification

pH value	6 ... 9
Total hardness	1.7 mmol/l
Electrical conductivity	500 μS/cm
Chloride ions	40 mg/l
Sulfate ions	50 mg/l
Nitrate ions	50 mg/l
Dissolved substances	340 mg/l
Maximum particle size	100 μm
Antifreeze/corrosion protection	20 ... 30 %

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm


Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservados todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfältigung dieser Unterlage. Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwahlhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.






Copyright© Siemens AG 2005
Cuid-drawing do not make any
manual changes

DE - shaft extension
version with featherkey



deviation acc. to
DIN 6885 sheet 1

DIN 332 - DR M12

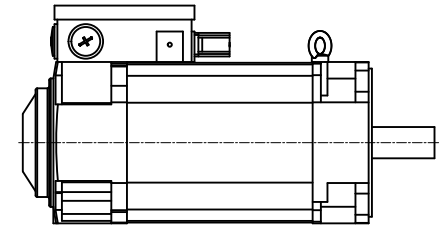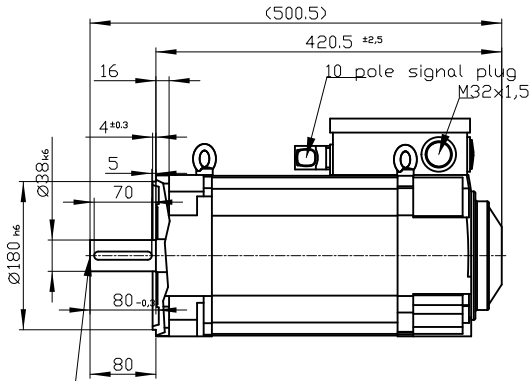

Type of construction: IM B5 (IM V1, IM V3)

/ Type of protection: IP65

		—	
		—	
Terminal box	gk823	1PH8107-1DF22-1BA1	
Weight	83 kg		
Unit	mm [in]		
Date	4/13/23		
SIEMENS AG			
not toleranced dimensions: ± 1			
		DT	