



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8131-1JF13-2BA2

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	13.0	71.0	24.0	416	59.8	1,750	148	50.0	8,000	96.0	30	0.914	0.840	10.3
	BLM/SLM 400V	11.0	70.0	24.0	360	51.4	1,500	148	50.0	8,000	96.0	30	0.899	0.840	10.4
	ALM 480V	16.5	72.0	24.0	500	75.0	2,200	148	50.0	8,000	96.0	30	0.920	0.870	10.0
	BLM/SLM 480V	15.0	72.0	24.0	460	68.2	2,000	148	50.0	8,000	96.0	30	0.931	0.860	9.2

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	132
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B35 (IM V15, IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard with fixed bearing
Shaft end	Feather key with half key balancing
Encoder system	Incremental encoder HTL 2048 S/R, max. encoder speed = 4600 rpm

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.13 A
3 AC 400 V / 60 Hz (±10%)	0.16 A
3 AC 480 V / 60 Hz (±10%)	0.17 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	30 min
Moment of inertia	590 kgcm ²
Weight (approx.)	89 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk833

Cooling data and sound pressure level

Airflow, min.	0.09 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	140 Pa

Confie a titre de secret d'entreprise. Tous droits reserves.
Confidado como secreto industrial. Nos reservados todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos







Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdruecklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Copyright© Siemens AG 2005
Cada-drawing do not make any
manual changes

DE - shaft extension
version with featherkey

deviation acc. to
DIN 6885 sheet 1

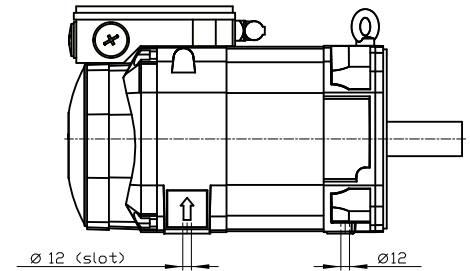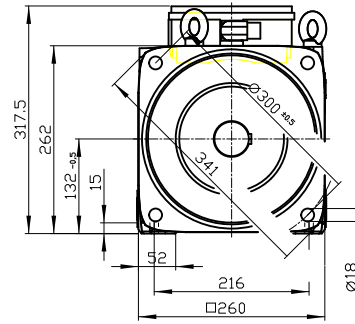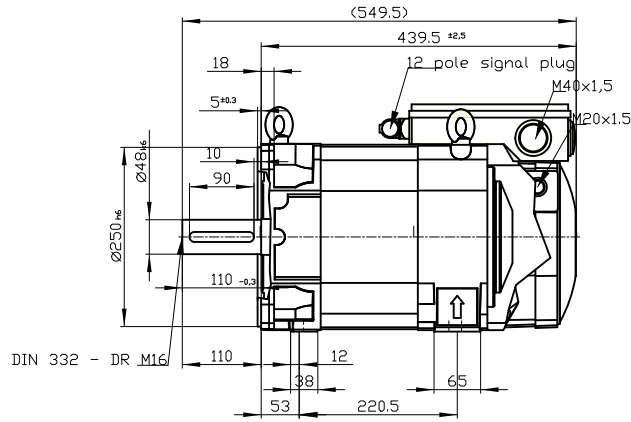

Type of construction: IM B35 (IM V15, IM V35) / Type of protection: IP55

		—	
		—	
Terminal box	gk833	1PH8131-1JF13-2BA2	
Weight	89 kg		
Unit	mm [in]		
Date	4/27/23		
SIEMENS AG		—	
not toleranced dimensions: ± 1			
		DT	