



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8131-1UF02-0LA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	13.0	71.0	24.0	416	59.8	1,750	148	50.0	10,000	96.0	30	0.914	0.840	10.3
	BLM/SLM 400V	11.0	70.0	24.0	360	51.4	1,500	148	50.0	10,000	96.0	30	0.899	0.840	10.4
	ALM 480V	16.5	72.0	24.0	500	75.0	2,200	148	50.0	10,000	96.0	30	0.920	0.870	10.0
	BLM/SLM 480V	15.0	72.0	24.0	460	68.2	2,000	148	50.0	10,000	96.0	30	0.931	0.860	9.2

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	132
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	SPECIAL/B
Shaft and flange accuracy	SPECIAL
Degree of protection	IP55
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Performance
Shaft end	Plain shaft
Encoder system	Incremental encoder 20 bit without commutation position (encoder IN20DQ)

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.21 A
3 AC 400 V / 60 Hz (±10%)	0.19 A
3 AC 480 V / 60 Hz (±10%)	0.23 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants





Thermal time constant	30 min
Moment of inertia	590 kgcm ²
Weight (approx.)	89 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk833

Cooling data and sound pressure level

Airflow, min.	0.09 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	140 Pa

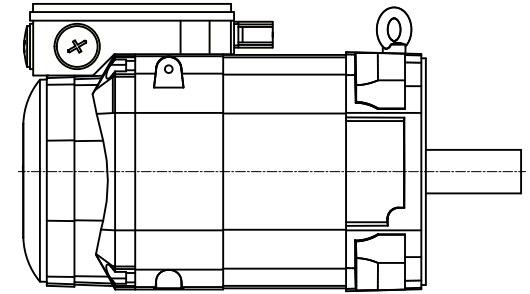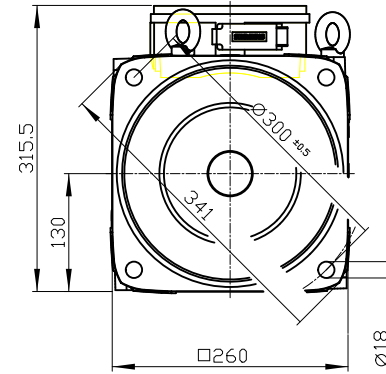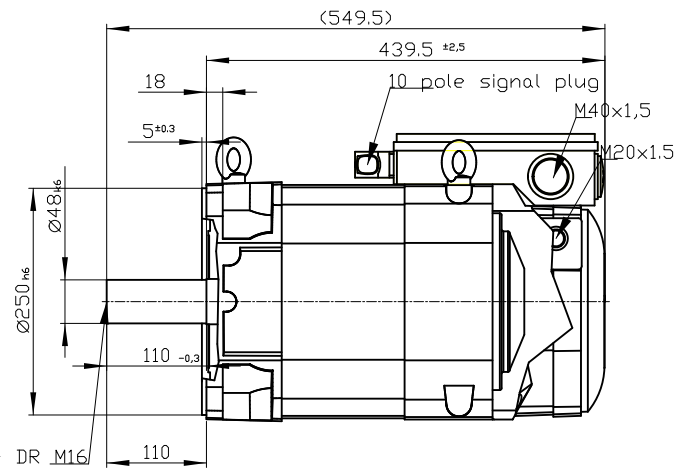

Type of construction IM B5 (IM V1, IM V3)		/ Type of protection: IP55	
		—	
		—	
Terminal box	gk833	1PH8131-1UF02-0LA1	
Weight	89 kg		
Unit	mm (in)		
Date	4/27/23		
SIEMENS AG		—	
not toleranced dimensions: ± 1		DT	