



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8135-1MS00-0MA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	24.5	117.0	51.0	372	68.0	2,000	300	132.0	15,000	157.0	62	0.917	0.850	20.9
	BLM/SLM 400V	18.5	118.0	51.0	283	51.3	1,500	300	132.0	15,000	157.0	62	0.901	0.850	21.1
	ALM/BLM/SLM 480V	30.5	117.0	50.0	460	84.6	2,500	300	132.0	15,000	157.0	62	0.949	0.850	20.8
Δ	ALM 400V	24.5	47.0	52.0	425	167.5	5,000	131	145.0	15,000	94.0	78	0.939	0.810	22.8
	BLM/SLM 400V	18.5	44.0	51.0	364	134.0	4,000	131	145.0	15,000	94.0	78	0.912	0.760	23.3
	ALM/BLM/SLM 480V	30.5	49.0	50.0	460	201.0	6,000	131	145.0	15,000	94.0	78	0.941	0.860	20.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	132
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	SPECIAL/B
Shaft and flange accuracy	SPECIAL
Degree of protection	IP55
Design acc. to Code I	IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8)
Temperature monitoring	KTY84 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	High Performance
Shaft end	Plain shaft
Encoder system	Incremental encoder sin/cos 1Vpp 2048 S/R with C- and D-Spur, max. encoder speed = 12000 rpm

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.21 A
3 AC 400 V / 60 Hz (±10%)	0.19 A
3 AC 480 V / 60 Hz (±10%)	0.23 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	30 min
Moment of inertia	940 kgcm ²
Weight (approx.)	125 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk846

Cooling data and sound pressure level






Airflow, min.	0.09 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	140 Pa

Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder Gk-Entragung.

The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Copyright© Siemens AG 2005
Cada-drawing do not make any
manual changes

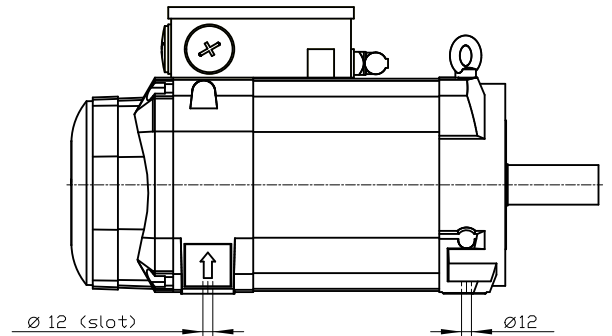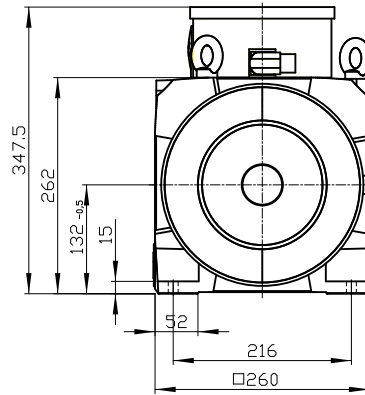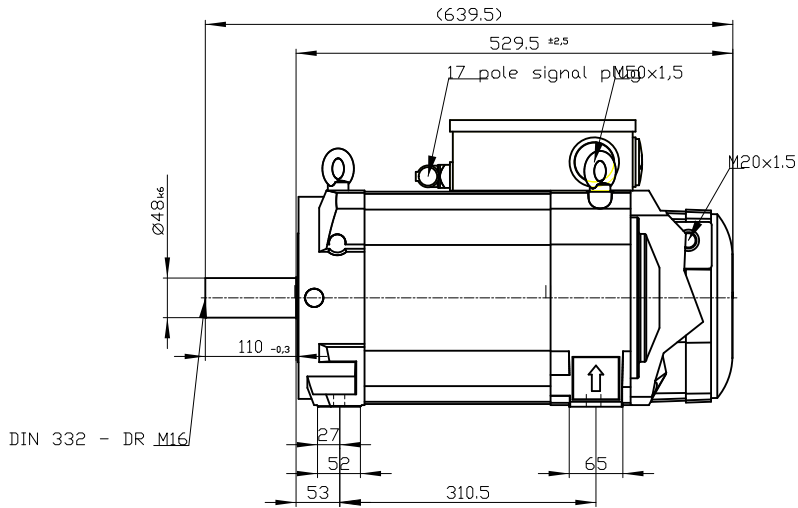

Type of construction: IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8) Protection: IP55

		
Terminal box		gk846
Weight		125 kg
Unit		mm [in]
Date		4/18/23
SIEMENS AG		1PH8135-1MS00-0MA1
not toleranced dimensions: ± 1		