



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8135-2DG10-2BA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	35.6	148.0	59.0	407	76.7	2,300	390	179.0	4,500	158.0	63	0.953	0.000	0.0
	BLM/SLM 400V	31.4	150.0	59.0	356	66.7	2,000	390	179.0	4,500	158.0	63	0.953	0.000	0.0
	ALM/BLM/SLM 480V	40.2	145.0	58.0	449	88.3	2,650	390	179.0	4,500	158.0	63	0.952	0.000	0.0

Mechanical data

Motor type	Permanent-magnet synchronous motor
Shaft height	132
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard with fixed bearing
Shaft end	Feather key with half key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.13 A
3 AC 400 V / 60 Hz (±10%)	0.16 A
3 AC 480 V / 60 Hz (±10%)	0.17 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	10 min
Moment of inertia	750 kgcm ²
Weight (approx.)	120 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk833

Cooling data and sound pressure level

Airflow, min.	0.09 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	140 Pa

Copyright© Siemens AG 2005
Cod-drawing do not make any manual changes


The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder GK-Entragung.






Confie a titre de secret d'entreprise. Tous droits reserves. Confiado como secreto industrial. Nos reservamos todos los derechos. Comunicado como segredo empresarial. Reservados todos os direitos.

DE - shaft extension
version with featherkey

deviation acc. to
DIN 6885 sheet 1



DIN 332 - DR M16

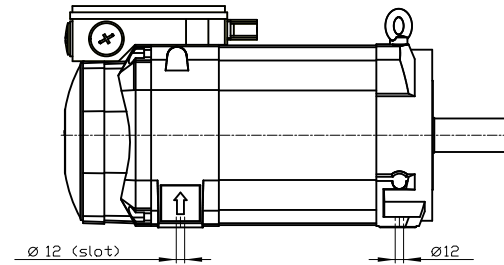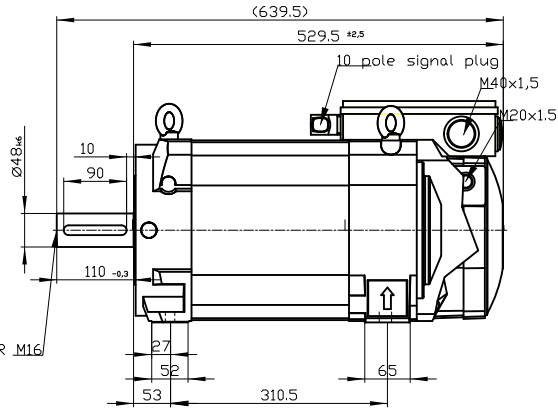

Type of construction: IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8) Protection: IP55

			
Terminal box		gk833	1PH8135-2DG10-2BA1
Weight		120 kg	
Unit		mm [in]	
Date		4/28/23	
SIEMENS AG			DT
not toleranced dimensions: ± 1			