

Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8137-1CF00-0LA2

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	25.0	136.0	56.0	353	59.6	1,750	380	151.0	10,000	172.0	68	0.907	0.840	23.1
	BLM/SLM 400V	22.0	140.0	56.0	308	51.3	1,500	380	151.0	10,000	172.0	68	0.904	0.840	24.2
	ALM/BLM/SLM 480V	28.0	134.0	55.0	401	67.9	2,000	380	151.0	10,000	172.0	68	0.931	0.840	23.1

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	132
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	SPECIAL/B
Shaft and flange accuracy	SPECIAL
Degree of protection	IP55
Design acc. to Code I	IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Performance
Shaft end	Plain shaft
Encoder system	Incremental encoder sin/cos 1Vpp 256 S/R without ND-end at terminal box (encoder IN256S/R)

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.21 A
3 AC 400 V / 60 Hz (±10%)	0.19 A
3 AC 480 V / 60 Hz (±10%)	0.23 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	30 min
Moment of inertia	1,090 kgcm²
Weight (approx.)	141 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk833

Cooling data and sound pressure level


Airflow, min.	0.09 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	140 Pa

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes





The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves.
Confido como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

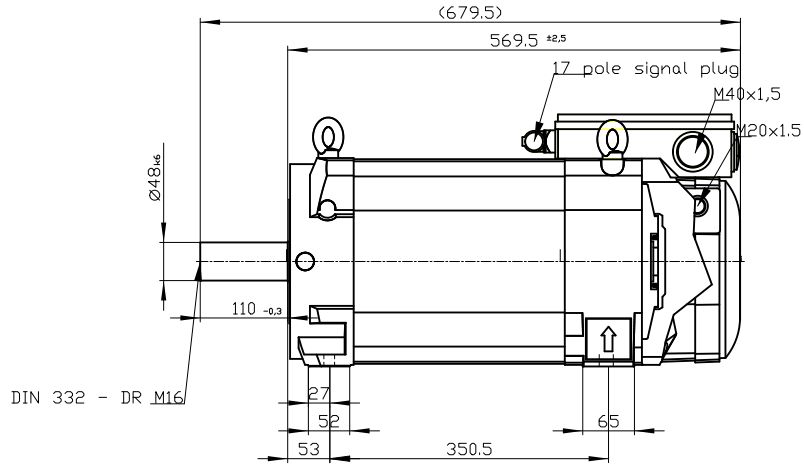

DIN 332 - DR M16

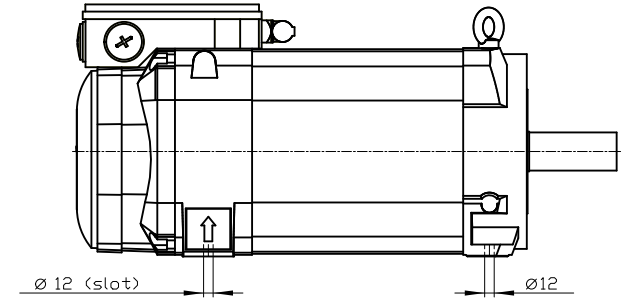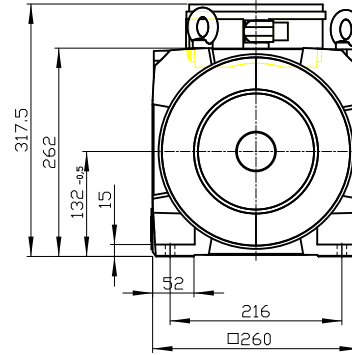

Type of construction: IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8) Protection: IP55

		—	
		—	
Terminal box	gk833	1PH8137-1CF00-0LA2	
Weight	141 kg		
Unit	mm [in]		
Date	4/28/23		
SIEMENS AG		—	
not toleranced dimensions: ± 1			
		DT	