



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8137-1FD03-0GD1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	19.5	162.0	43.0	350	39.8	1,150	405	108.0	8,000	183.0	47	0.891	0.870	16.1
	BLM/SLM 400V	17.0	162.0	43.0	307	34.8	1,000	405	108.0	8,000	183.0	47	0.881	0.880	15.1
	ALM/BLM/SLM 480V	22.0	156.0	42.0	404	46.4	1,350	405	108.0	8,000	183.0	47	0.902	0.860	15.9

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	132
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B35 (IM V15, IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Plain shaft
Encoder system	Absolut encoder 22 bit Singleturn + 12 bit Multiturn, max. encoder speed = 12000 rpm

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.21 A
3 AC 400 V / 60 Hz (±10%)	0.19 A
3 AC 480 V / 60 Hz (±10%)	0.23 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	30 min
Moment of inertia	1,090 kgcm ²
Weight (approx.)	141 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	DE
Signal connection	left
Terminal box designation	gk833

Cooling data and sound pressure level






Airflow, min.	0.09 m ³ /s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	70 dB ¹⁾
Air discharge	axial
Pressure drop	140 Pa

Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder GK-Entragung.

The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Copyright© Siemens AG 2005
Cada-drawing do not make any manual changes

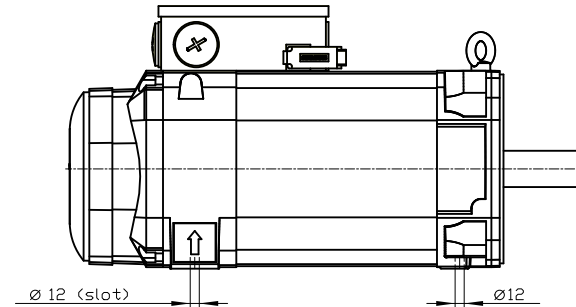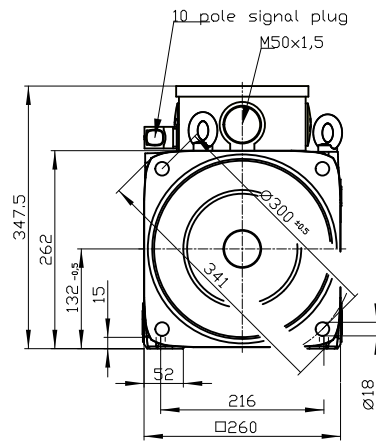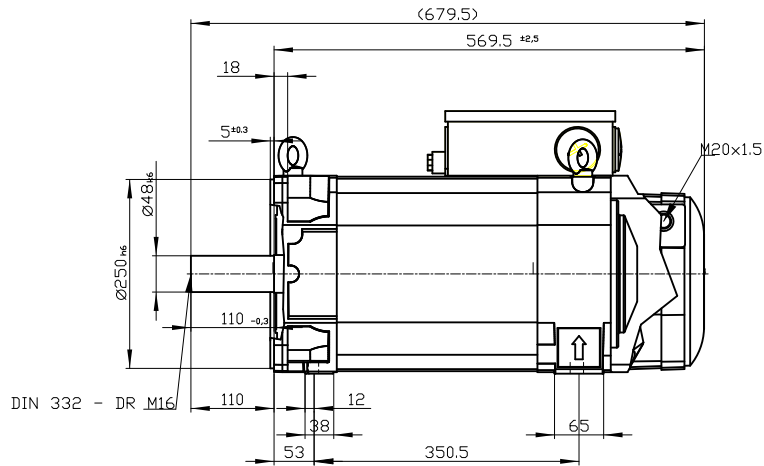

Type of construction: IM B35 (IM V15, IM V35) / Type of protection: IP55

		
Terminal box		gk833
Weight		141 kg
Unit		mm [in]
Date		4/28/23
SIEMENS AG		1PH8137-1FD03-0GD1
not toleranced dimensions: ± 1		