



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8138-2DG22-2QB1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	67.7	281.0	130.0	415	76.7	2,300	460	235.0	4,500	290.0	133	0.961	0.000	0.0
	BLM/SLM 400V	59.3	283.0	131.0	374	66.7	2,000	460	235.0	4,500	290.0	133	0.960	0.000	0.0
	ALM/BLM/SLM 480V	76.3	275.0	130.0	449	88.3	2,650	460	235.0	4,500	290.0	133	0.962	0.000	0.0

Mechanical data

Motor type	Permanent-magnet synchronous motor
Shaft height	132
Cooling	Water cooling
Vibration severity grade	S/A
Shaft and flange accuracy	R
Degree of protection	IP65
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Advanced Lifetime
Shaft end	Feather key with half key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

Physical constants

Thermal time constant	5 min
Moment of inertia	885 kgcm ²
Weight (approx.)	156 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	left
Signal connection	DE
Terminal box designation	gk843

Cooling data and sound pressure level

Flow rate, min.	12 l/min
Sound pressure level L _{pA} (1m) motor rated load, tolerance + 3dB	68 dB ¹⁾
Pressure drop	0.9 bar
NDE thread connection	0.375 Inches

Cooling water specification

pH value	6 ... 9
Total hardness	1.7 mmol/l
Electrical conductivity	500 μS/cm
Chloride ions	40 mg/l
Sulfate ions	50 mg/l
Nitrate ions	50 mg/l
Dissolved substances	340 mg/l
Maximum particle size	100 μm
Antifreeze/corrosion protection	20 ... 30 %

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm


Confie a titre de secret d'entreprise. Tous droits reserves.
Confido como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfaeltigung dieser Unterlage. Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdruecklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.






Copyright© Siemens AG 2005
Cuidado: do not make any
manual changes

DE - shaft extension
version with featherkey



deviation acc. to
DIN 6885 sheet 1

DIN 332 - DR M16

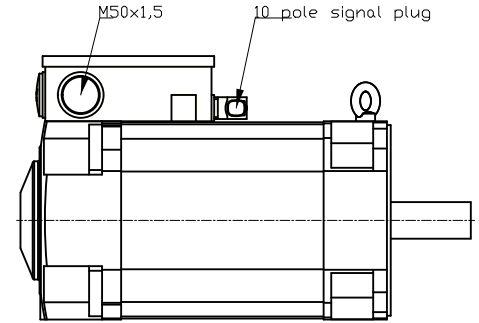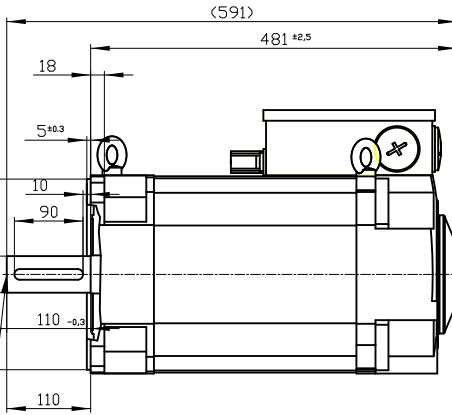

Type of construction: IM B5 (IM V1, IM V3) / Type of protection: IP65

	Terminal box	gk843	1PH8138-2DG22-2QB1
	Weight	156 kg	
	Unit	mm (in)	
	Date	4/19/23	
SIEMENS AG			
not toleranced dimensions: ± 1			DT