



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8163-1AF02-2BA2

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	34.0	186.0	70.0	366	59.2	1,750	600	217.0	6,500	252.0	87	0.926	0.870	24.6
	BLM/SLM 400V	30.0	191.0	71.0	319	50.8	1,500	600	217.0	6,500	252.0	87	0.923	0.870	25.6
	ALM/BLM/SLM 480V	37.0	177.0	68.0	416	67.4	2,000	600	217.0	6,500	252.0	87	0.932	0.860	24.6

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	160
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B5 (IM V1, IM V3)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard with fixed bearing
Shaft end	Feather key with half key balancing
Encoder system	Without encoder

External fan

Max. power consumption	
3 AC 400 V / 50 Hz (±10%)	0.26 A
3 AC 400 V / 60 Hz (±10%)	0.32 A
3 AC 480 V / 60 Hz (±10%)	0.33 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	35 min
Moment of inertia	2,160 kgcm ²
Weight (approx.)	196 kg


Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk863




Cooling data and sound pressure level

Airflow, min.	0.16 m ³ /s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	200 Pa

Copyright(C) Siemens AG 2005



Technical drawing of the DIN 332 - DR M20 pressure washer, showing a side view with dimensions. The drawing includes a handle with a trigger gun, a spray lance, and a spray gun. Dimensions are given in millimeters. Key dimensions include: total length 603 ±0.5, handle length 110, trigger gun length 19, spray lance length 55, spray gun length 99.5, and a total length of 346.5 for the main body. The handle has a diameter of Ø300 ±0.5 and a length of 110. The trigger gun has a diameter of Ø55 ±0.5 and a length of 19. The spray lance has a diameter of Ø55 ±0.5 and a length of 55. The spray gun has a diameter of Ø55 ±0.5 and a length of 99.5. The handle has a mounting hole of M50x1.5 and a trigger gun hole of M20x1.5. The drawing is labeled 'DIN 332 - DR M20'.

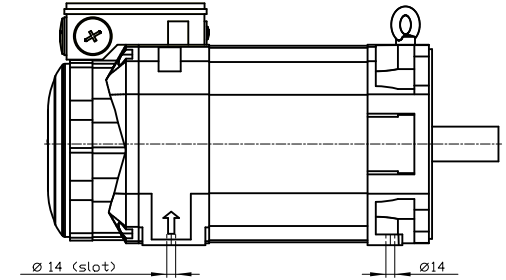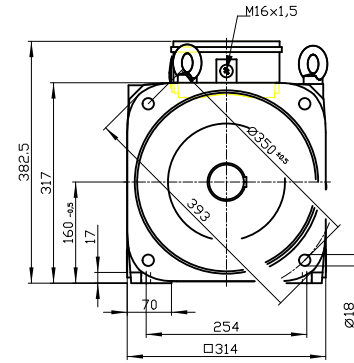

Type of construction IM B5 (IM V1, IM V3)		/ Type of protection: IP55	
	—		
	—		
Terminal box	gk863	1PH8163-1AF02-2BA2	
Weight	196 kg		
Unit	mm (in)		
Date	5/2/23		
SIEMENS AG		—	
not toleranced dimensions: ± 1		DT	