



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8163-1HG00-2GB2

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	38.0	158.0	78.0	370	77.4	2,300	570	272.0	6,500	254.0	111	0.935	0.870	28.2
	BLM/SLM 400V	36.0	172.0	83.0	324	67.5	2,000	570	272.0	6,500	254.0	111	0.929	0.880	28.1
	ALM/BLM/SLM 480V	40.0	144.0	76.0	390	89.2	2,650	570	272.0	6,500	254.0	111	0.936	0.890	23.1

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	160
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Feather key with half key balancing
Encoder system	Incremental encoder HTL 1024 S/R, max. encoder speed = 9000 rpm

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.26 A
3 AC 400 V / 60 Hz (±10%)	0.32 A
3 AC 480 V / 60 Hz (±10%)	0.33 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants


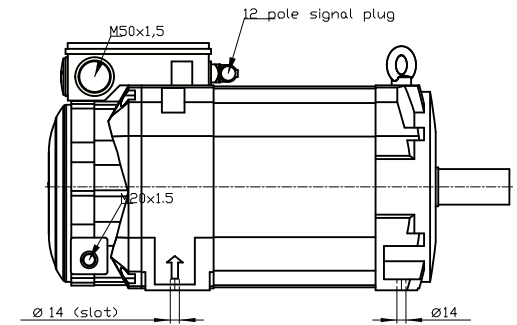


Thermal time constant	35 min
Moment of inertia	2,160 kgcm ²
Weight (approx.)	196 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	left
Signal connection	DE
Terminal box designation	gk863

Cooling data and sound pressure level

Airflow, min.	0.16 m ³ /s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	200 Pa

DIN 332 - DR M20

Type of construction: IM B3 (IM V5, IM V6, IM B6, IM B7) IP66 of protection: IP55	
	—
Terminal box	gk863
Weight	196 kg
Unit	mm [in]
Date	4/20/23
1PH8163-1HG00-2GB2	
—	
SIEMENS AG	
not toleranced dimensions: ± 1	DT