



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8163-1SD03-3MB1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	25.0	208.0	55.0	343	39.2	1,150	600	151.0	10,000	243.0	60	0.915	0.880	17.5
	BLM/SLM 400V	22.0	210.0	55.0	300	34.2	1,000	600	151.0	10,000	243.0	60	0.909	0.890	17.3
	ALM/BLM/SLM 480V	28.0	198.0	52.0	400	45.8	1,350	600	151.0	10,000	243.0	60	0.924	0.880	17.7

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	160
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	SPECIAL/B
Shaft and flange accuracy	SPECIAL
Degree of protection	IP55
Design acc. to Code I	IM B35 (IM V15, IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	High Performance
Shaft end	Smooth hollow shaft
Encoder system	Incremental encoder 19 bit without commutation position (encoder IN19DQ)

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.26 A
3 AC 400 V / 60 Hz (±10%)	0.32 A
3 AC 480 V / 60 Hz (±10%)	0.33 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	35 min
Moment of inertia	2,160 kgcm ²
Weight (approx.)	196 kg





Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	left
Signal connection	DE
Terminal box designation	gk863

Cooling data and sound pressure level

Airflow, min.	0.16 m ³ /s
Sound pressure level L _{pA} (1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	200 Pa

Copyright(C) Siemens AG 2005

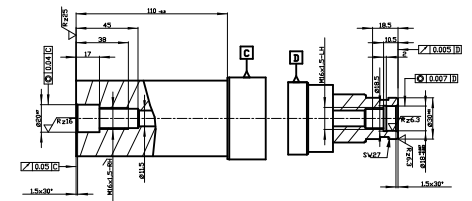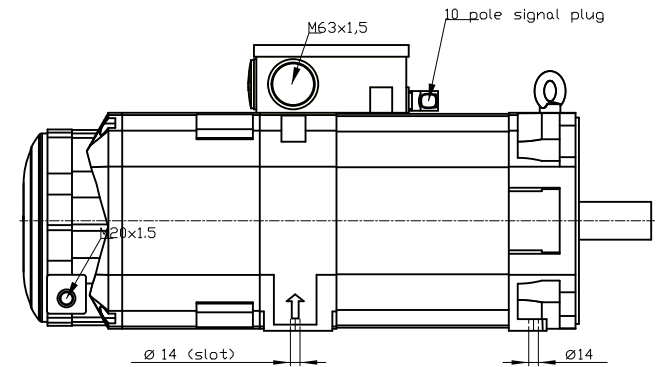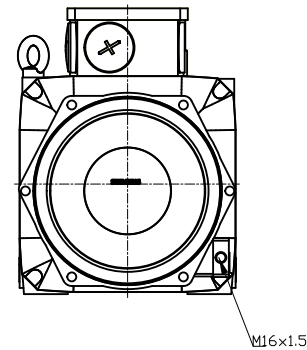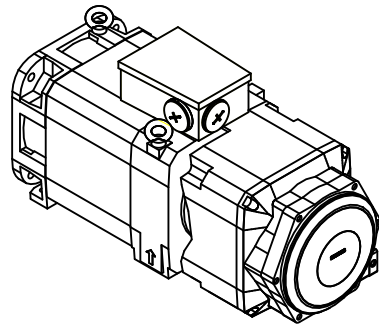

		— —	
Terminal box	gk863	1PH8163-1SD03-3MB1	
Weight	196 kg		
Unit	mm [in]		
Date	5/3/23		
SIEMENS AG		—	
not toleranced dimensions: ± 1			
		DT	