



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8165-2DF10-2BA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	69.0	375.0	115.0	395	117.0	1,750	1,135	367.0	4,000	440.0	126	0.943	0.000	0.0
	BLM/SLM 400V	61.0	390.0	119.0	340	100.0	1,500	1,135	367.0	4,000	440.0	126	0.940	0.000	0.0
	ALM/BLM/SLM 480V	74.0	355.0	110.0	445	133.0	2,000	1,135	367.0	4,000	440.0	126	0.946	0.000	0.0

Mechanical data

Motor type	Permanent-magnet synchronous motor
Shaft height	160
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard with fixed bearing
Shaft end	Feather key with half key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

3 AC 400 V / 50 Hz (±10%)	0.17 A
3 AC 400 V / 60 Hz (±10%)	0.22 A
3 AC 480 V / 60 Hz (±10%)	0.22 A

¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	10 min
Moment of inertia	2,160 kgcm ²
Weight (approx.)	218 kg

Connection


Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	gk874

Cooling data and sound pressure level






Airflow, min.	0.16 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	200 Pa

Copyright© Siemens AG 2005
Cod-drawing do not make any manual changes
The reproduction or use of this document or its contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.
Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder GK-Entragung.
Confide a titre de secret d'entreprise. Tous droits reserves.
Confidado como secreto industrial. Nos reservamos todos los derechos Comunicado como segredo empresarial. Reservados todos os direitos

DE - shaft extension version with featherkey
deviation acc. to DIN 6885 sheet 1



DIN 332 - DR M20

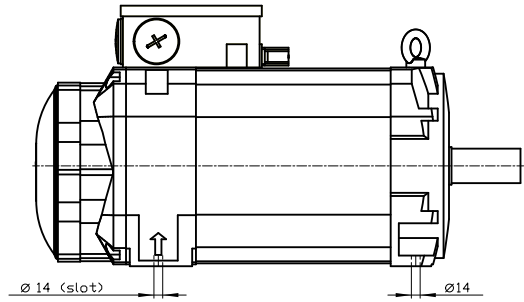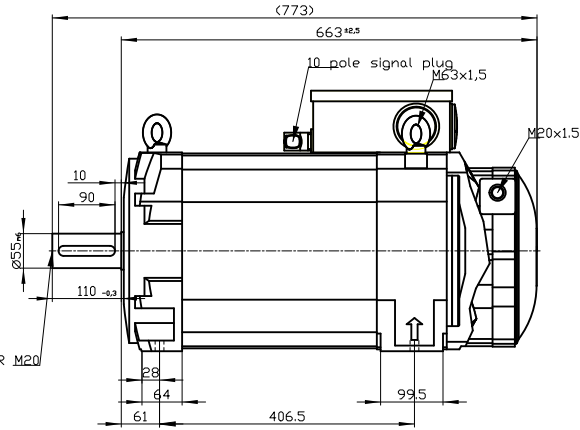

Type of construction: IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8) Protection: IP55

		
Terminal box		gk874
Weight		218 kg
Unit		mm [in]
Date		5/3/23
SIEMENS AG		
not toleranced dimensions: ± 1		DT