

Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8166-1DG23-0MC1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	72.0	299.0	124.0	420	77.8	2,300	600	241.0	10,000	353.0	147	0.946	0.890	35.5
	BLM/SLM 400V	64.0	306.0	125.0	376	67.8	2,000	600	241.0	10,000	353.0	147	0.937	0.880	39.3
	ALM/BLM/SLM 480V	83.0	299.0	125.0	460	89.6	2,650	600	241.0	10,000	353.0	147	0.948	0.900	35.7

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	160
Cooling	Water cooling
Vibration severity grade	SPECIAL/B
Shaft and flange accuracy	SPECIAL
Degree of protection	IP65
Design acc. to Code I	IM B35 (IM V15, IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	High Performance
Shaft end	Plain shaft
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

Physical constants

Thermal time constant	14 min
Moment of inertia	2,320 kgcm ²
Weight (approx.)	269 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	NDE
Signal connection	left
Terminal box designation	gk873

Cooling data and sound pressure level

Flow rate, min.	15 l/min
Sound pressure level L _{pA} (1m) motor rated load, tolerance + 3dB	69 dB ¹⁾
Pressure drop	0.2 bar
NDE thread connection	0.5 Inches

Cooling water specification

pH value	6 ... 9
Total hardness	1.7 mmol/l
Electrical conductivity	500 μS/cm
Chloride ions	40 mg/l
Sulfate ions	50 mg/l
Nitrate ions	50 mg/l
Dissolved substances	340 mg/l
Maximum particle size	100 μm
Antifreeze/corrosion protection	20 ... 30 %






¹⁾ at a rated frequency of 4 kHz and a speed range of up to 5000 rpm

Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder Gk-Entragung.

The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes

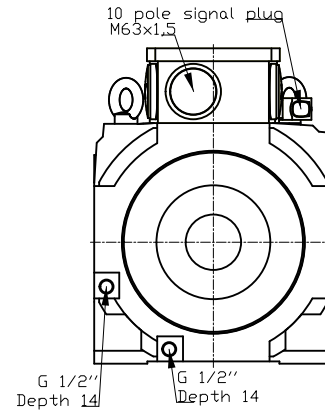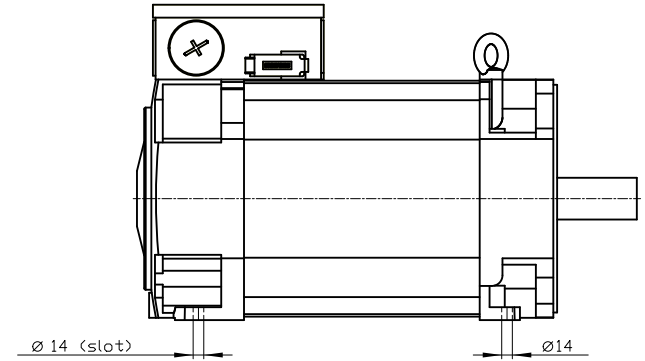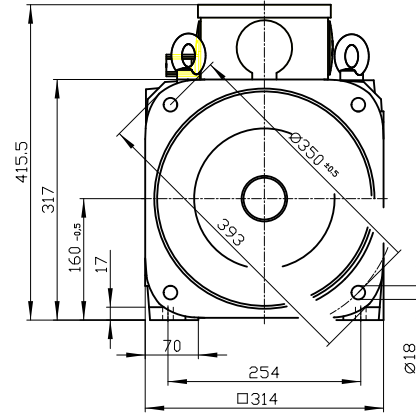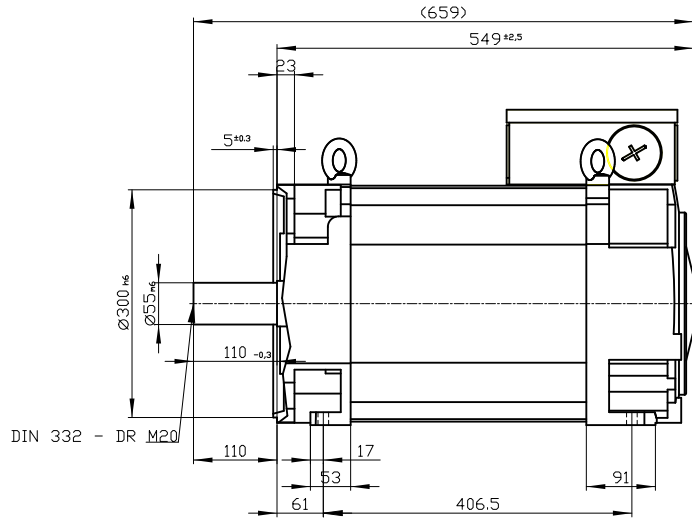

Type of construction: IM B35 (IM V15, IM V35) / Type of protection: IP65

		—	
		—	
Terminal box	gk873	1PH8166-1DG23-0MC1	
Weight	269 kg		
Unit	mm [in]		
Date	4/20/23		
SIEMENS AG		—	
not toleranced dimensions: ± 1			
		DT	