

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8184-1DD23-2BA1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	54.0	448.0	112.0	350	39.2	1,150	897	224.0	5,000	448.0	112	0.915	0.870	46.0
	BLM/SLM 400V	47.0	449.0	114.0	300	34.2	1,000	898	228.0	5,000	449.0	114	0.904	0.880	45.0
	ALM/BLM/SLM 480V	64.0	453.0	112.0	410	45.8	1,350	905	224.0	5,000	453.0	112	0.924	0.870	46.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	180
Cooling	Water cooling
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B35 with A450 flange (IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Feather key with half key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

Physical constants

Thermal time constant	25 min
Moment of inertia	4,890 kgcm ²
Weight (approx.)	340 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	1XB7322-P05

Cooling data and sound pressure level






Flow rate, min.	15 l/min
Sound pressure level L _{pA} (1m) motor rated load, tolerance + 3dB	70 dB ¹⁾
Pressure drop	0.6 bar
NDE thread connection	0.375 Inches

Cooling water specification

pH value	6 ... 9
Total hardness	1.7 mmol/l
Electrical conductivity	2,000 μS/cm
Chloride ions	250 mg/l
Sulfate ions	240 mg/l
Nitrate ions	50 mg/l
Dissolved substances	340 mg/l
Maximum particle size	100 μm
Antifreeze/corrosion protection	20 ... 30 %

¹⁾ at a rated frequency of 2 kHz or 4 kHz and a speed range of up to 5000 rpm

Confie a titre de secret d'entreprise. Tous droits réservés.
 Confiado como secreto industrial. Nos reservamos todos los derechos
 Comunicado como segredo empresarial. Reservados todos os direitos

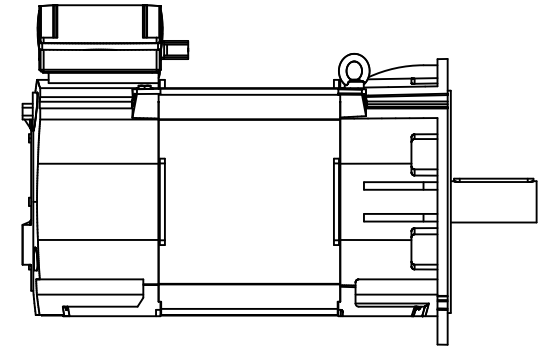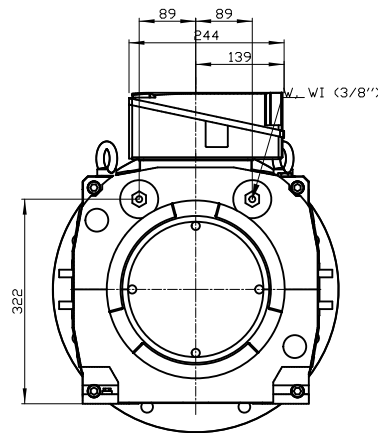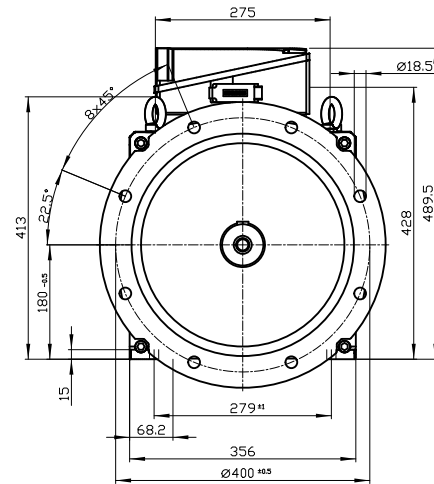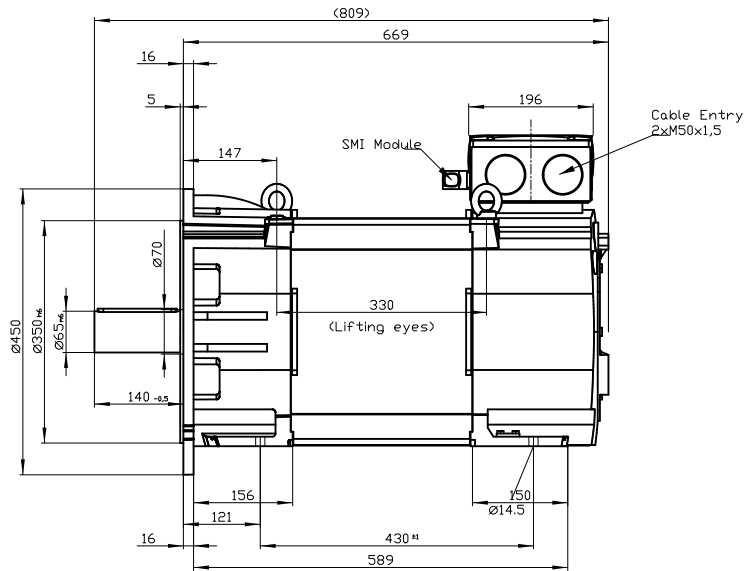

Type of construction: IM B35 with A450 flange (IM V35)/ Type of protection: IP55

		
Terminal box	1XB7322-P05	1PH8184-1DD23-2BA1
Weight	340 kg	
Unit	mm [in]	
Date	4/20/23	
SIEMENS AG		
not tolerated dimensions: ± 1		DT