



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8184-1DF03-1BA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	60.0	327.0	120.0	390	58.9	1,750	925	300.0	5,000	327.0	120	0.944	0.790	64.0
	BLM/SLM 400V	51.0	325.0	116.0	335	50.6	1,500	925	300.0	5,000	325.0	116	0.940	0.800	63.0
	ALM/BLM/SLM 480V	68.0	325.0	118.0	450	67.2	2,000	925	300.0	5,000	325.0	118	0.947	0.780	65.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	180
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B35 with A450 flange (IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Feather key with full key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

1 AC 200 ... 277 V (±10%) 50/60 Hz ±10% 1.1 ... 1.3 A

¹⁾ at a rated frequency of 2 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	22 min
Moment of inertia	4,890 kgcm ²
Weight (approx.)	350 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	1XB7322-P05

Cooling data and sound pressure level






Airflow, min.	0.17 m ³ /s
Sound pressure level L _{pA} (1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	550 Pa

Copyright© Siemens AG 2005
Cod-drawing do not make any manual changes

The reproduction or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves. Confido como secreto Industrial. Nos reservamos todos los derechos. Comunicado como segredo empresarial. Reservados todos os direitos.

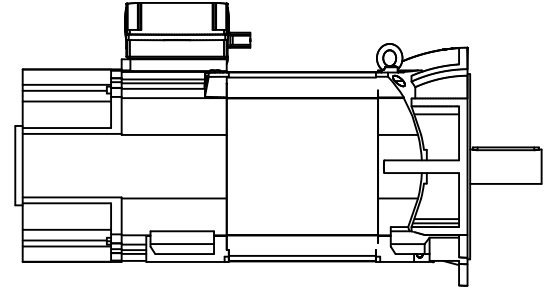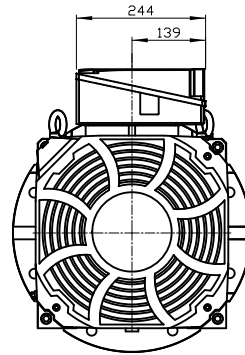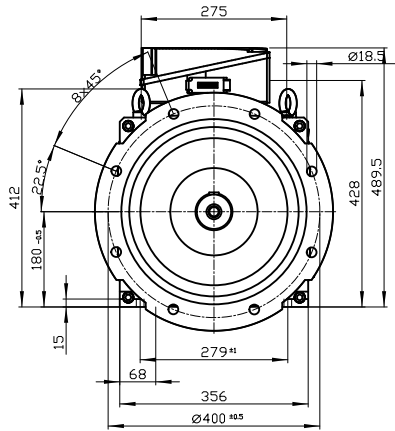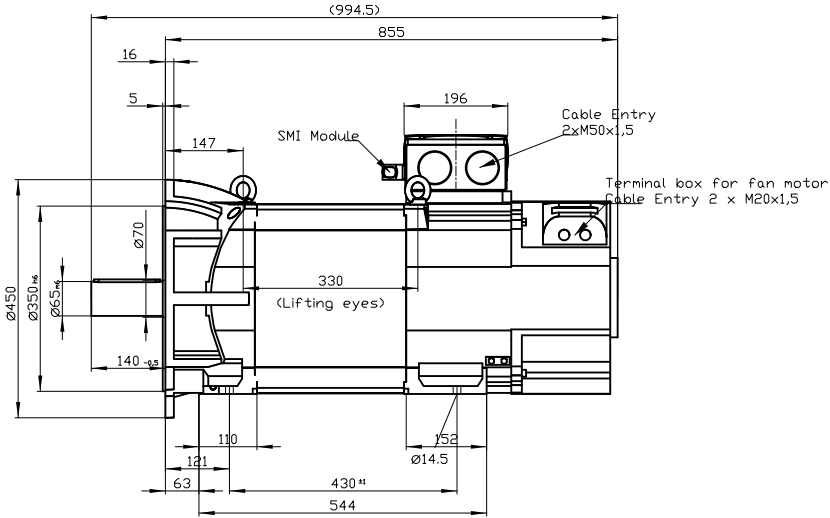

Type of construction: IM B35 with A450 flange (IM V35)/ Type of protection: IP55

		— —	
Terminal box	1XB7322-P05	1PH8184-1DF03-1BA1	
Weight	350 kg		
Unit	mm [in]		
Date	5/3/23		
SIEMENS AG		—	
not toleranced dimensions: ± 1			
		DT	