

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8184-1DF10-2BA1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	60.0	327.0	120.0	390	58.9	1,750	925	300.0	5,000	327.0	120	0.944	0.790	64.0
	BLM/SLM 400V	51.0	325.0	116.0	335	50.6	1,500	925	300.0	5,000	325.0	116	0.940	0.800	63.0
	ALM/BLM/SLM 480V	68.0	325.0	118.0	450	67.2	2,000	925	300.0	5,000	325.0	118	0.947	0.780	65.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	180
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B3 (IM B6, IM B7, IM B8, IM V6)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Feather key with half key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

1 AC 200 ... 277 V (±10%) 50/60 Hz ±10% 1.1 ... 1.3 A

¹⁾ at a rated frequency of 2 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	22 min
Moment of inertia	4,890 kgcm ²
Weight (approx.)	350 kg




Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	1XB7322-P05

Cooling data and sound pressure level

Airflow, min.	0.17 m ³ /s
Sound pressure level L _{pA} (1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	550 Pa

Confie a titre de secret d'entreprise. Tous droits réservés.
 Confiado como secreto industrial. Nos reservamos todos los derechos
 Comunicado como segredo empresarial. Reservados todos os direitos

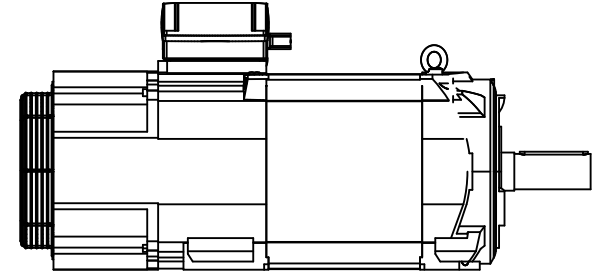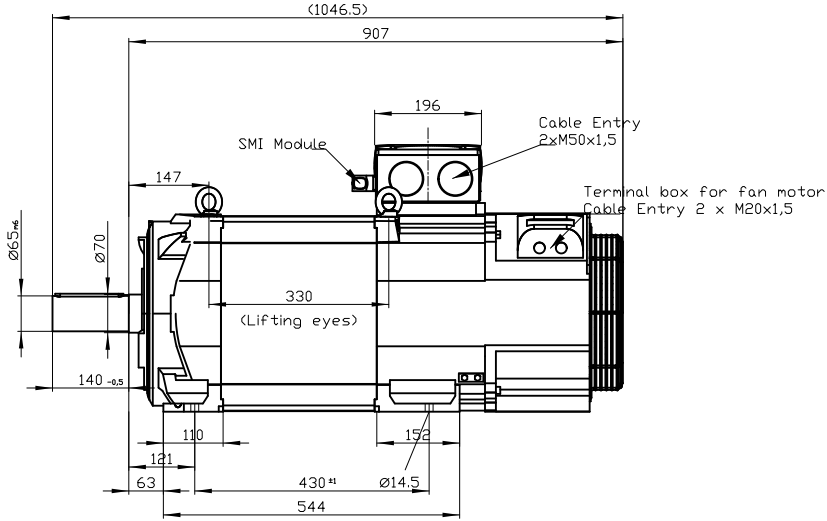

Type of construction: IM B3 (IM B6, IM B7, IM B8, IM V6) Type of protection: IP55	
	—
	—
	Terminal box 1XB7322-P05
	Weight 350 kg
	Unit mm (in)
Date 4/20/23	1PH8184-1DF10-2BA1
SIEMENS AG	—
not tolerated dimensions: ± 1	DT