

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8184-1FD30-2AA1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	65.0	540.0	120.0	390	39.4	1,150	925	205.0	5,000	540.0	120	0.911	0.880	39.0
	BLM/SLM 400V	57.0	544.0	120.0	340	34.4	1,000	925	205.0	5,000	544.0	120	0.899	0.890	39.0
	ALM/BLM/SLM 480V	74.0	523.0	118.0	450	46.0	1,350	925	205.0	5,000	523.0	118	0.922	0.880	39.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	180
Cooling	Open circuit cooling DE-> NDE
Vibration severity grade	A
Shaft and flange accuracy	N
Degree of protection	IP23
Design acc. to Code I	IM B3 (IM B6, IM B7, IM B8, IM V6)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Feather key with half key balancing
Encoder system	Absolut encoder 22 bit Singleturn + 12 bit Multiturn, max. encoder speed = 12000 rpm

Physical constants

Thermal time constant	26 min
Moment of inertia	4,890 kgcm ²
Weight (approx.)	350 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	1XB7322-P05

Cooling data and sound pressure level

Airflow, min.	0.21 m ³ /s
Sound pressure level L _{pA} (1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	450 Pa




External fan

Max. power consumption

1 AC 200 ... 277 V (±10%) 50/60 Hz ±10% 1.1 ... 1.3 A

¹⁾ at a rated frequency of 2 kHz and a speed range of up to 3000 rpm

Copyright(C) Siemens AG 2005

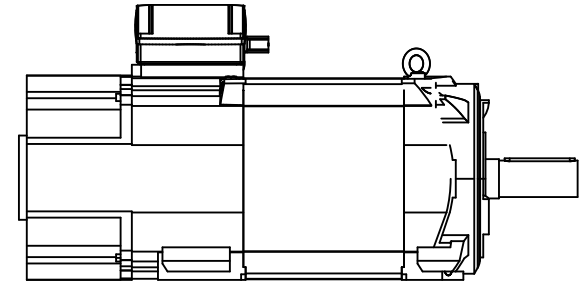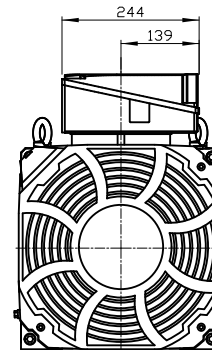

		
Terminal box	1XB7322-P05	1PH8184-1FD30-2AA1
Weight	350 kg	
Unit	mm [in]	
Date	4/20/23	
SIEMENS AG		
not toleranced dimensions: ± 1		DT