



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8184-1HF10-1EA2

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	60.0	327.0	120.0	390	58.9	1,750	925	300.0	5,000	327.0	120	0.944	0.790	64.0
	BLM/SLM 400V	51.0	325.0	116.0	335	50.6	1,500	925	300.0	5,000	325.0	116	0.940	0.800	63.0
	ALM/BLM/SLM 480V	68.0	325.0	118.0	450	67.2	2,000	925	300.0	5,000	325.0	118	0.947	0.780	65.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	180
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	A
Shaft and flange accuracy	N
Degree of protection	IP55
Design acc. to Code I	IM B3 (IM B6, IM B7, IM B8, IM V6)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Increased cantilever forces
Shaft end	Feather key with full key balancing
Encoder system	Incremental encoder HTL 1024 S/R, max. encoder speed = 9000 rpm

¹⁾ at a rated frequency of 2 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	22 min
Moment of inertia	4,890 kgcm ²
Weight (approx.)	350 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	1XB7322-P05

Cooling data and sound pressure level

Airflow, min.	0.17 m ³ /s
Sound pressure level L _p A(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	550 Pa

External fan

Max. power consumption






1 AC 200 ... 277 V (±10%) 50/60 Hz ±10%	1.1 ... 1.3 A
---	---------------

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes

The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves.
Confido como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

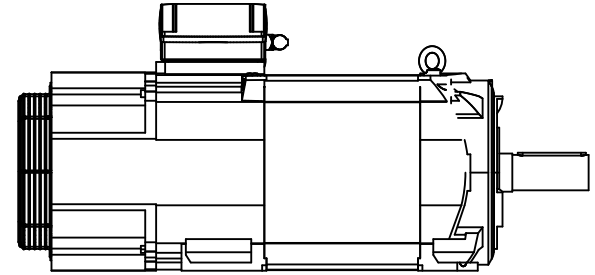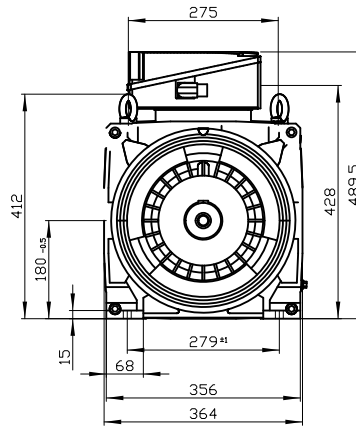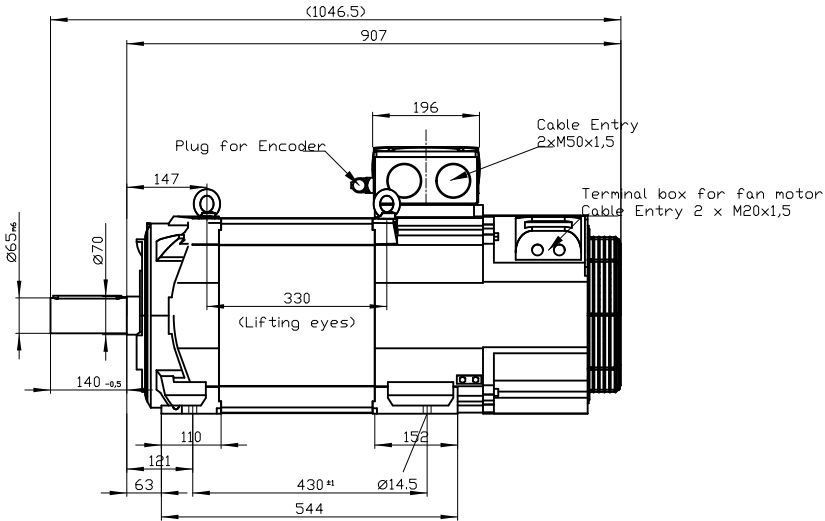

Type of construction: IM B3 (IM B6, IM B7, IM B8, IM V6) Type of protection: IP55

		—	
Terminal box		1XB7322-P05	1PH8184-1HF10-1EA2
Weight		350 kg	
Unit		mm [in]	
Date		5/3/23	
SIEMENS AG			—
not toleranced dimensions: ± 1			
DT			