

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8184-1MF03-1BA2



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	60.0	327.0	120.0	390	58.9	1,750	925	300.0	5,000	327.0	120	0.944	0.790	64.0
	BLM/SLM 400V	51.0	325.0	116.0	335	50.6	1,500	925	300.0	5,000	325.0	116	0.940	0.800	63.0
	ALM/BLM/SLM 480V	68.0	325.0	118.0	450	67.2	2,000	925	300.0	5,000	325.0	118	0.947	0.780	65.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	180
Cooling	Forced ventilation DE -> NDE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B35 with A450 flange (IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Feather key with full key balancing
Encoder system	Incremental encoder sin/cos 1Vpp 2048 S/R with C- and D-Spur, max. encoder speed = 12000 rpm

External fan

Max. power consumption

1 AC 200 ... 277 V (±10%) 50/60 Hz ±10% 1.1 ... 1.3 A

¹⁾ at a rated frequency of 2 kHz and a speed range of up to 5000 rpm

Physical constants






Thermal time constant	22 min
Moment of inertia	4,890 kgcm ²
Weight (approx.)	350 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	1XB7322-P05

Cooling data and sound pressure level

Airflow, min.	0.17 m ³ /s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	550 Pa

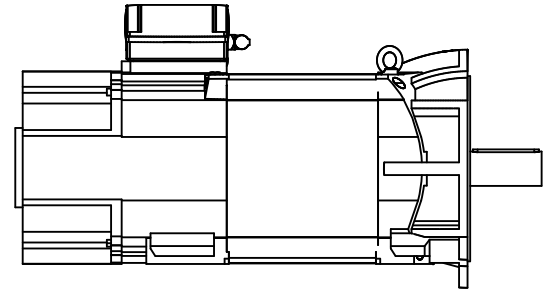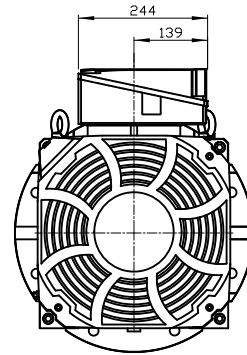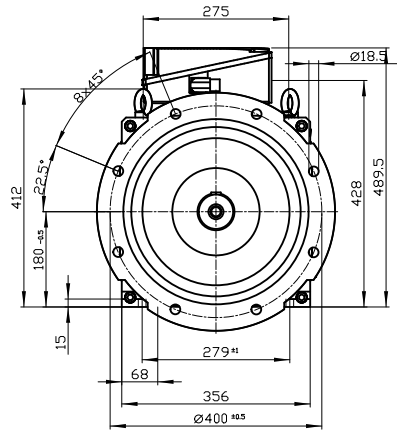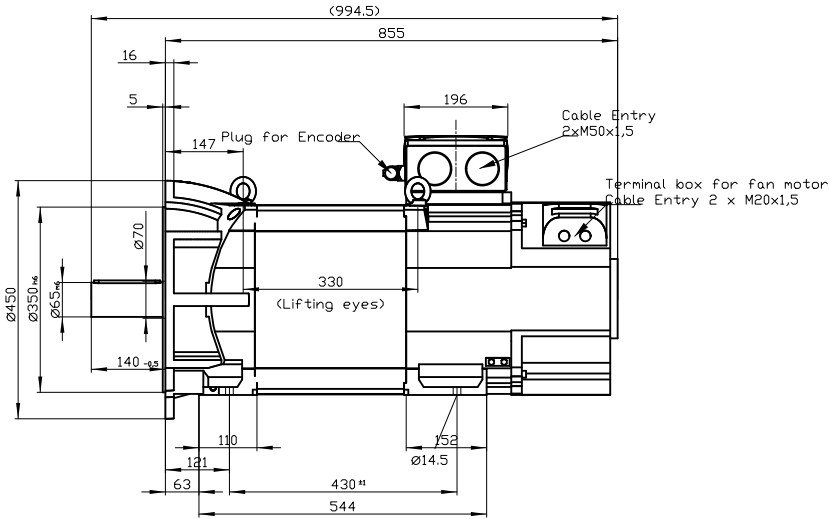

Type of construction: IM B35 with A450 flange (IM V35)/ Type of protection: IP55

	Terminal box	1X87322-P05	1PH8184-1MF03-1BA2
	Weight	350 kg	
	Unit	mm (in)	—
	Date	4/24/23	
SIEMENS AG			
not toleranced dimensions: ± 1			DT