



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8184-2FF15-2BA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	82.0	447.0	150.0	359	117.0	1,750	1,450	490.0	3,800	480.0	157	0.954	0.000	0.0
	BLM/SLM 400V	70.0	446.0	148.0	308	100.0	1,500	1,450	490.0	3,800	480.0	157	0.951	0.000	0.0
	ALM/BLM/SLM 480V	86.0	411.0	138.0	404	133.0	2,000	1,450	490.0	3,800	480.0	157	0.957	0.000	0.0

Mechanical data

Motor type	Permanent-magnet synchronous motor
Shaft height	180
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM V15 with A450 flange
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Feather key with half key balancing
Encoder system	Absolut encoder 22 bit Singleturn + 12 bit Multiturn, max. encoder speed = 12000 rpm

Physical constants

Thermal time constant	18 min
Moment of inertia	4,600 kgcm ²
Weight (approx.)	330 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	1XB7322-P05

Cooling data and sound pressure level

Airflow, min.	0.17 m ³ /s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	550 Pa

External fan

Max. power consumption	
1 AC 200 ... 277 V (±10%) 50/60 Hz ±10%	1.1 ... 1.3 A






¹⁾ at a rated frequency of 2 kHz and a speed range of up to 5000 rpm

Copyright© Siemens AG 2005
Cod-drawing do not make any manual changes

The reproduction or use of this document or its contents is not permitted without express written authority. Diffenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder GK-Entragung.

Confie a titre de secret d'entreprise. Tous droits reserves. Confido como secreto industrial. No reservamos todos los derechos. Comunicado como segredo empresarial. Reservados todos os direitos.

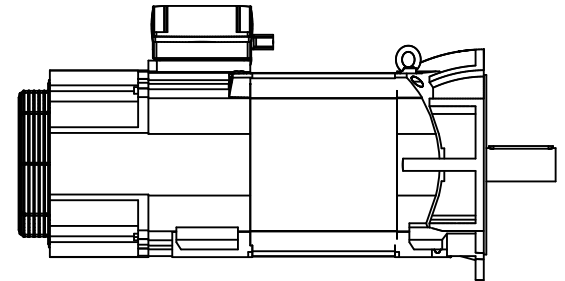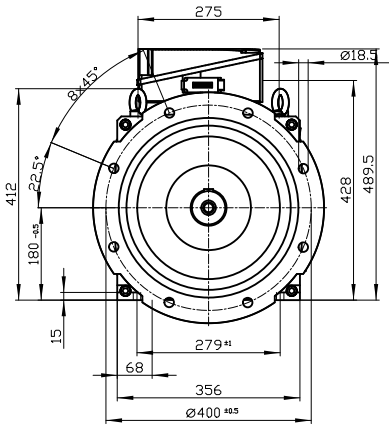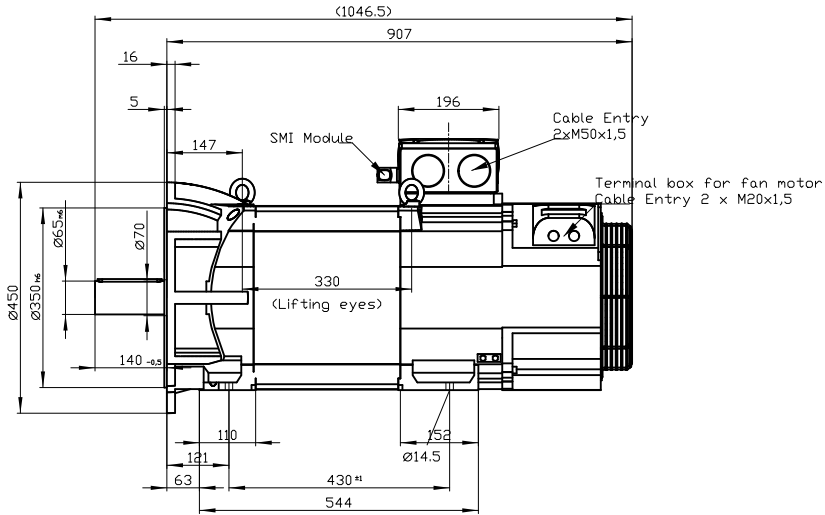

Type of construction: IM V15 with A450 flange / Type of protection: IP55

			
Terminal box	1XB7322-P05	1PH8184-2FF15-2BA1	
Weight	330 kg		
Unit	mm (in)		
Date	5/3/23		
SIEMENS AG		-	
not toleranced dimensions: ± 1			
		DT	