



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8186-1DD10-1EA1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Y	ALM 400V	58.0	482.0	112.0	390	38.9	1,150	1,230	265.0	5,000	482.0	112	0.933	0.820	57.0
	BLM/SLM 400V	51.0	487.0	112.0	340	34.0	1,000	1,230	265.0	5,000	487.0	112	0.926	0.830	56.0
	ALM/BLM/SLM 480V	67.0	474.0	112.0	450	45.6	1,350	1,230	265.0	5,000	474.0	112	0.939	0.820	55.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	180
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	A
Shaft and flange accuracy	N
Degree of protection	IP55
Design acc. to Code I	IM B3 (IM B6, IM B7, IM B8, IM V6)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Increased cantilever forces
Shaft end	Feather key with full key balancing
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

External fan

Max. power consumption

1 AC 200 ... 277 V (±10%) 50/60 Hz ±10% 1.1 ... 1.3 A

¹⁾ at a rated frequency of 2 kHz and a speed range of up to 5000 rpm

Physical constants

Thermal time constant	25 min
Moment of inertia	6,520 kgcm ²
Weight (approx.)	422 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE top
Power connection	right
Signal connection	DE
Terminal box designation	1XB7322-P05

Cooling data and sound pressure level






Airflow, min.	0.17 m ³ /s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	73 dB ¹⁾
Air discharge	axial
Pressure drop	550 Pa

Confie a titre de secret d'entreprise. Tous droits réservés.
Confidado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Copyright© Siemens AG 2005
Cuidado: no se debe hacer
ningún cambio

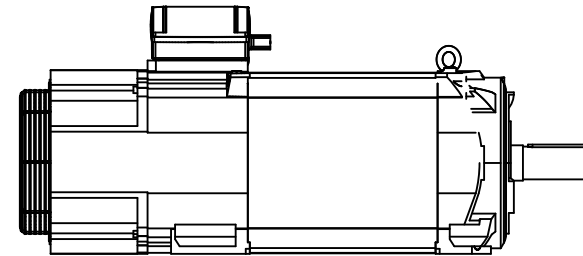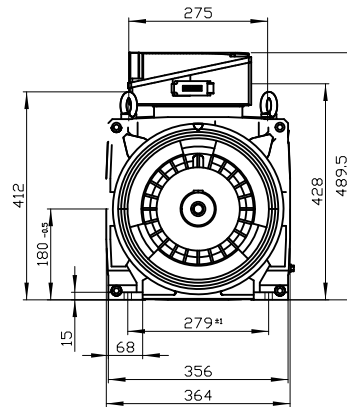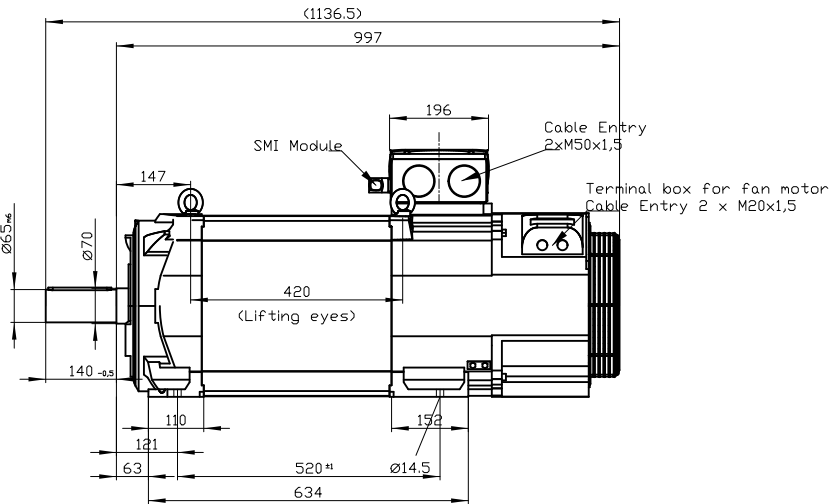

Type of construction: IM B3 (IM B6, IM B7, IM B8, IM V6) Type of protection: IP55

			
Terminal box		1XB7322-P05	1PH8186-1DD10-1EA1
Weight		422 kg	
Unit		mm [in]	
Date		4/20/23	
SIEMENS AG		DT	
not toleranced dimensions: ± 1			