

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8284-1DC13-0BU1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Δ	ALM 400V	125.0	1,492.0	235.0	400	27.0	800	4,250	660.0	3,300	1,492.0	235	0.952	0.810	124.0
	BLM/SLM 400V	110.0	1,501.0	240.0	330	23.7	700	4,250	660.0	3,300	1,501.0	240	0.947	0.850	106.0
	ALM/BLM/SLM 480V	150.0	1,433.0	230.0	455	33.7	1,000	4,250	660.0	3,300	1,433.0	230	0.957	0.860	101.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	280
Cooling	Forced ventilation NDE -> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP55
Design acc. to Code I	IM B35 with A660 flange (IM V35)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Plain shaft
Encoder system	Incremental encoder 22 bit with commutation position 11 bit, max. encoder speed = 12000 rpm

Physical constants

Thermal time constant	47 min
Moment of inertia	42,000 kgcm ²
Weight (approx.)	1,200 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE right
Power connection	below
Signal connection	DE
Terminal box designation	1XB7700-P02

Cooling data and sound pressure level

Airflow, min.	0.42 m ³ /s
Sound pressure level L _{pA} (1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	74 dB ¹⁾
Air discharge	radial
Pressure drop	600 Pa

External fan

Max. power consumption

3 AC 380 ... 480 V (-5% / +10%) 50/60 Hz ±10%	0.75 ... 0.90 A
--	-----------------





¹⁾ at a rated frequency of 2 kHz and a speed range of up to 3300 rpm

Confie a titre de secret d'entreprise. Tous droits réservés.
Confiado como secreto industrial. Nos reservamos todos los derechos
Comunicado como segredo empresarial. Reservados todos os direitos

Weitergabe sowie Vervielfältigung dieser Unterlage. Verwer-
tung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer
den Fall der Patenterteilung oder GK-Entragung.

The reproduction or use of this document or its
contents is not permitted without express written authority.
Diffenders will be liable for damages. All rights, including rights
created by patent grant or registration of a utility model or design,
are reserved.

Copyright© Siemens AG 2005
Cod-drawing do not make any
manual changes

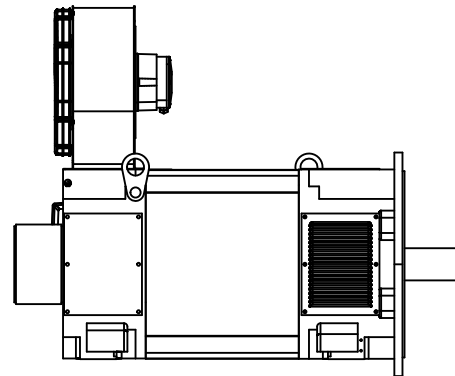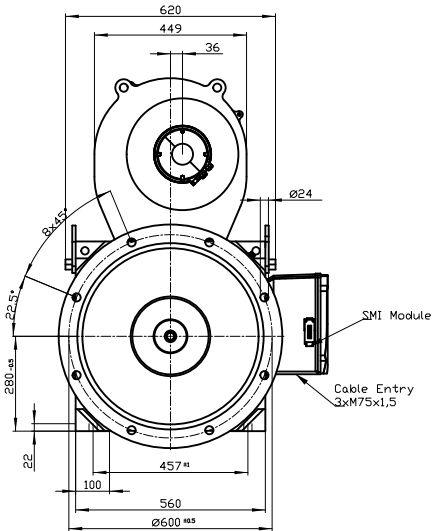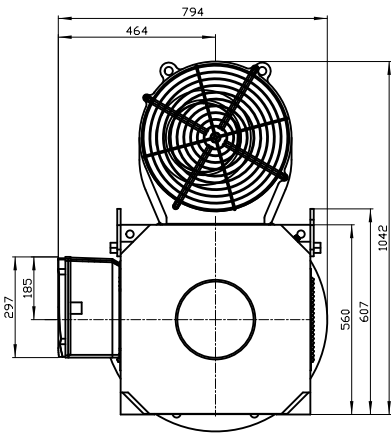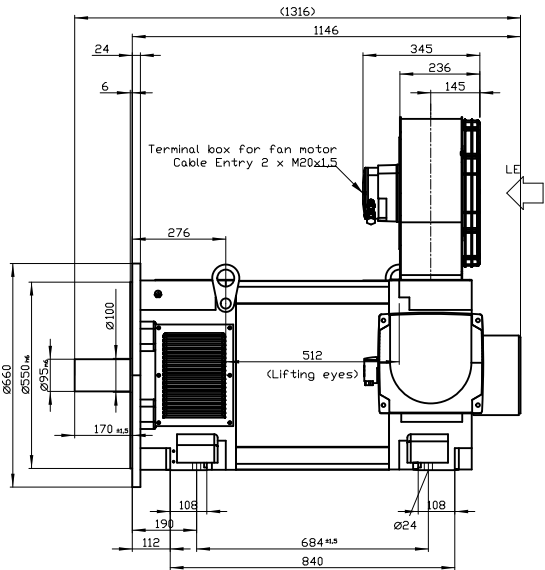

Type of construction: IM B35 with A660 flange (IM V35) / Type of protection: IP55

Terminal box	1XB7700-P02	1PH8284-1DC13-0BU1	
Weight	1200 kg		
Unit	mm (in)		
Date	4/24/23		
SIEMENS AG			
not toleranced dimensions: ± 1		DT	