



Figure similar

Data sheet for SIMOTICS M-1PH8

Article No. : 1PH8288-1HD40-1BU2

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Engineering data

		P _N [kW]	M _N [Nm]	I _N [A]	U _N [V]	f _N [Hz]	n _N [rpm]	M _{max} [Nm]	I _{max} [A]	n _{max} [rpm]	M ₀ [Nm]	I ₀ [A]	η	cos φ	I _μ [A]
Δ	ALM 400V	435.0	3,607.0	760.0	385	38.8	1,150	6,350	1,300.0	3,300	3,607.0	760	0.958	0.900	244.0
	BLM/SLM 400V	379.0	3,619.0	760.0	335	33.8	1,000	6,350	1,300.0	3,300	3,619.0	760	0.955	0.900	242.0
	ALM/BLM/SLM 480V	505.0	3,573.0	750.0	450	45.5	1,350	6,350	1,300.0	3,300	3,573.0	750	0.962	0.900	243.0

Mechanical data

Motor type	Squirrel cage asynchronous motor
Shaft height	280
Cooling	Open circuit cooling NDE-> DE
Vibration severity grade	R/A
Shaft and flange accuracy	R
Degree of protection	IP23
Design acc. to Code I	IM B3 (IM V6)
Temperature monitoring	Pt1000 temperature sensor in the stator winding
Color	Standard (Anthracite RAL 7016)
Type of the bearing	Standard
Shaft end	Feather key with full key balancing
Encoder system	Incremental encoder HTL 1024 S/R, max. encoder speed = 9000 rpm

¹⁾ at a rated frequency of 2 kHz and a speed range of up to 2800 rpm

Physical constants

Thermal time constant	22 min
Moment of inertia	63,000 kgcm ²
Weight (approx.)	1,650 kg

Connection

Type of electrical connection	Terminal box
Position of the connection	NDE right
Power connection	below
Signal connection	DE
Terminal box designation	1XB7712-P03

Cooling data and sound pressure level




Airflow, min.	0.52 m³/s
Sound pressure level LpA(1m) motor + external fan operation 50 HZ rated load, tolerance + 3dB	74 dB ¹⁾
Air discharge	radial
Pressure drop	600 Pa

External fan

Max. power consumption

3 AC 380 ... 480 V (-5% / +10%) 50/60 Hz ±10%	0.75 ... 0.90 A
--	-----------------

Copyright(C) Siemens AG 2005

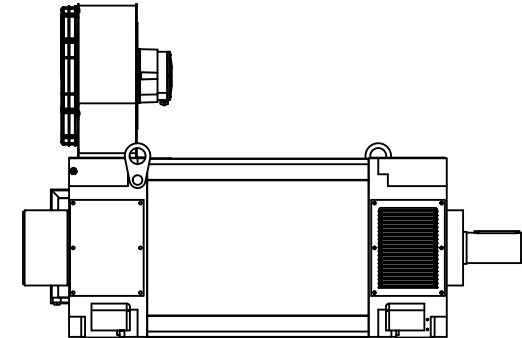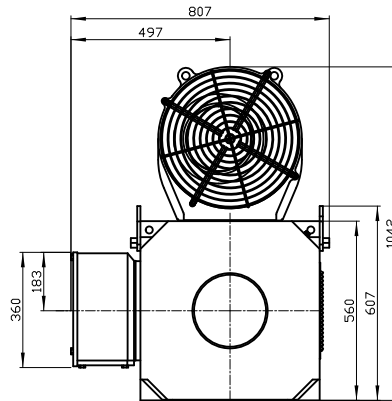

Type of construction: IM B3 (IM V6)		/ Type of protection: IP23	
		—	
Terminal box		1XB7712-P03	
Weight		1650 kg	
Unit		mm [in]	
Date		5/4/23	
SIEMENS AG		—	
not toleranced dimensions: ± 1		DT	