

HYOSUNG Induction Motor

HYOSUNG


[Home](#)

[TEFC Induction Motor, Foot Mounted \(B3\)](#)

[TEFC Induction Motor, Flange Mounted \(B5\)](#)



30KW / 40HP 4-pole TEFC Induction Motor, Foot Mounted

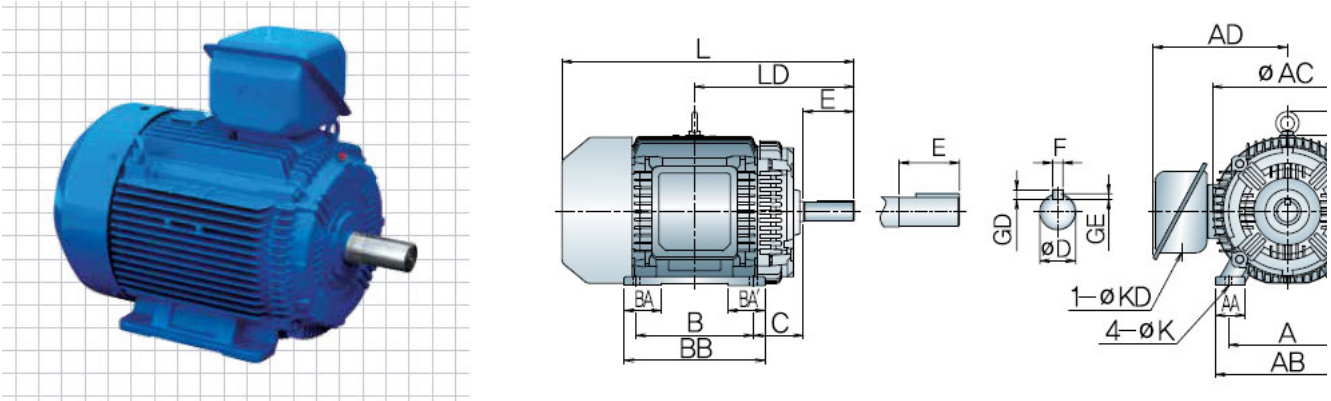

Dimensions (mm)											
Mounting			Shaft		Overall						
A	B	H	D	E	AB	AC	AD	HC	HD	L	
279	279	180	55	110	338	375	315	367	420	720	

General Specifications			
Rated Power	30KW / 40HP	Enclosure & Cooling	TEFC (Totally Enclosed, Fan Cooled)
Pole	4-pole (Speed 60Hz: 1770rpm)	Efficiency	High (IE2, 60Hz: 93%), Premium Efficiency
Frame	180L	Duty	Continuous (S1)
Mount	Foot Mounted - Horizontal (B3)	Insulation Class	F
Phase	3	Service Factor	1.15
Rated Voltage	220, 380, 400, 440, 220/380, 220/440, 415, 460V	Ambient Temperature	-20°C ~ +40°C
Frequency	50, 60Hz	Option	Explosion Proof (Ex e II T3)