


Standard Models

■ Standard Models

Voltage class	Protective structure	Maximum applied motor capacity	Model
200-V class	Enclosed wall-mounted type	3.7 kW	3G3HV-A2037-E
		5.5 kW	3G3HV-A2055-E
		7.5 kW	3G3HV-A2075-E
		11 kW	3G3HV-A2110-E
		15 kW	3G3HV-A2150-E
	Open-chassis type	18.5 kW	3G3HV-B2185-E
		22 kW	3G3HV-B2220-E
		30 kW	3G3HV-B2300-E
		37 kW	3G3HV-B2370-E
		45 kW	3G3HV-B2450-E
		55 kW	3G3HV-B2550-E
		75 kW	3G3HV-B2750-E
400-V class	Enclosed wall-mounted type	3.7 kW	3G3HV-A4037-E
		5.5 kW	3G3HV-A4055-E
		7.5 kW	3G3HV-A4075-E
		11 kW	3G3HV-A4110-E
		15 kW	3G3HV-A4150-E
	Open-chassis type	18.5 kW	3G3HV-B4185-E
		22 kW	3G3HV-B4220-E
		30 kW	3G3HV-B4300-E
		37 kW	3G3HV-B4370-E
		45 kW	3G3HV-B4450-E
		55 kW	3G3HV-B4550-E
		75 kW	3G3HV-B4750-E
		110 kW	3G3HV-B411K-E
		160 kW	3G3HV-B416K-E
		185 kW	3G3HV-B418K-E
		220 kW	3G3HV-B422K-E
		300 kW	3G3HV-B430K-E

Standard Models

■ Model Numbers

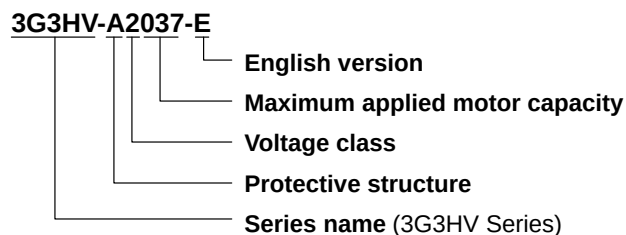

Maximum Applied Motor Capacity

037	3.7 kW
055	5.5 kW
075	7.5 kW
110	11 kW
150	15 kW
185	18.5 kW
220	22 kW
300	30 kW
370	37 kW
450	45 kW
550	55 kW
750	75 kW
11K	110 kW
16K	160 kW
18K	185 kW
22K	220 kW
30K	300 kW

Voltage Class

2	3-phase, 200 VAC (200-V class)
4	3-phase, 400 VAC (400-V class)

Protective Structure

A	Enclosed wall-mounted type
B	Open-chassis type