

AS-i compact module K45 digital 4 DI, IP67 4 x input, maximum 200 mA 4 x M12 socket Mounting plate 3RK1901-2EA00 or 3RK1901-2DA00 must be ordered separately

General technical data

design of the product	digital I/O modules for operation in the field, IP67 - K45
Type	4 inputs
design of the slave type	standard slave
I/O configuration	0
ID/ID2 code	0/F
Number I/O sockets	4
type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	Using PIN5 on the M12 sockets. Outgoing via flat tab sleeve (2.8 x 0.8 mm form A)
Addressing	front addressing socket
AS interface Connection Polarity reversal protection	built-in
Delivery note	the modules are delivered without mounting plate

Sensor supply

type of voltage supply for power supply	using AS-Interface
input voltage	20 ... 30 V
property of the sensor supply short-circuit and overload resistant	Yes
ampacity of the sensor supply for all inputs at ambient temperature 40 °C	200 mA

Inputs

number of digital inputs	4
type of connection technology	2- and 3-wire technology
Input circuit	PNP transistor
type of voltage of the input voltages	DC
Inputs switching level High min	10 V
input current at digital input - for signal <1> minimum - with signal <0> maximum	6 mA 1.5 mA
Inputs sensor supply using AS-Interface	short-circuit and overload resistant
Inputs socket assignment - PIN 1 - PIN 2 - PIN 3 - PIN 4 - PIN 5	sensor supply L+ data input sensor supply L- data input ground terminal
design of the pin assignment of the inputs	standard assignment

Outputs

number of digital outputs	0
---------------------------	---

Display		
Status display		
• display of I/Os		yellow LED
• display of Uaux		not required
• display of AS-Interface/diagnostics		green/red dual LED
Assignment of the data bits		
Assignment of data bits		
• socket		PIN 4/2 = IN1 (D0)
• socket 2		PIN 4/2 = IN2 (D1)
• socket 3		PIN 4/2 = IN3 (D2)
• socket 4		PIN 4/2 = IN4 (D3)
Ambient conditions		
ambient temperature		
• during operation		-25 ... +85 °C
• during storage		-40 ... +85 °C
protection class IP		IP67
Mechanical data		
width		45 mm
height		80 mm
depth		30 mm
fastening method		standard rail mounting/wall mounting using mounting plate for K45 compact module
shock resistance		15g / 11 ms
Certificates/ approvals		
General Product Approval		EMC
		Declaration of Con- formity



[Confirmation](#)



EG-Konf.

Marine / Shipping

other



LRS



PRS



RINA



DNV GL



ASi

other

[Confirmation](#)

[Miscellaneous](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1200-0CQ20-0AA3>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1200-0CQ20-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1200-0CQ20-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1200-0CQ20-0AA3&lang=en

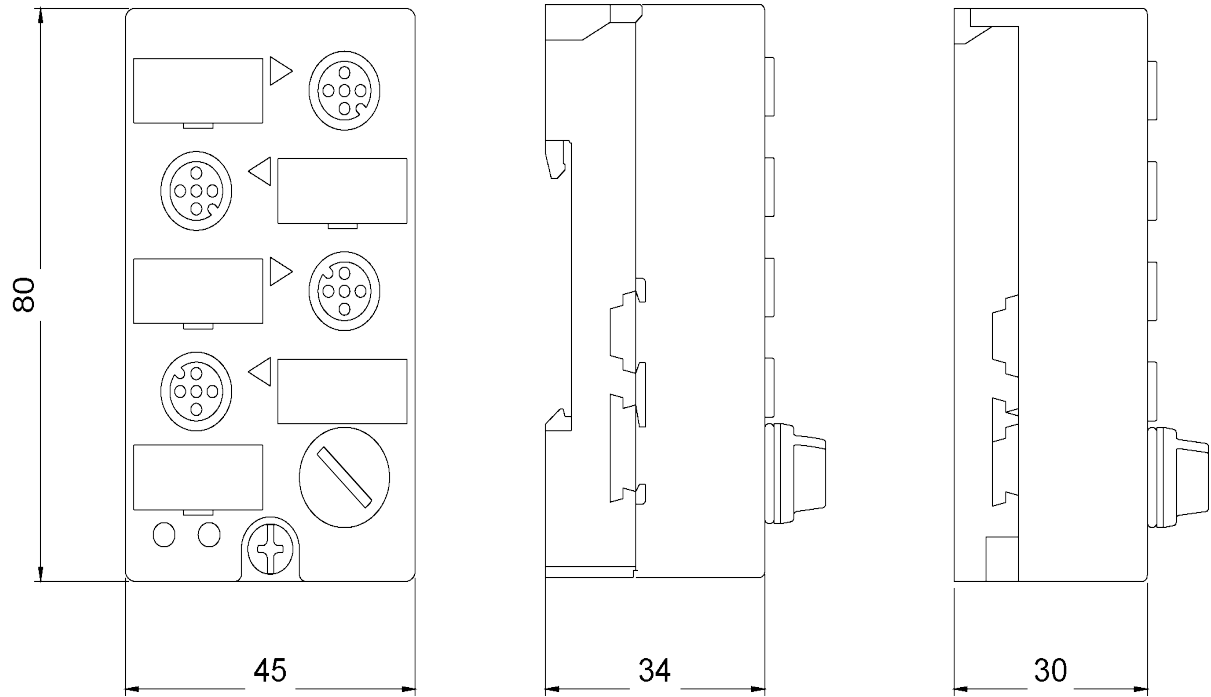

last modified:

3/11/2021 